


## Wire Cable Tray @ Mid-Roof

### Notes

- Cable tray is fabricated to 10'-0" lengths from 22 gauge Galvalume
- Cable tray is perforated with holes spaced at 3"oc. Split EPDM grommets are provided for field insertion when leads pass through.
- Hem is loose enough to not promote capillary entrapment and premature edge corrosion of cover. Cable tray is also perforated with 1/8" x 1" slotted holes at 4"oc where loose hem is bent for weeps. This slot also serves for hold down straps.
- Cable tray is also perforated with 3/8" x 1" holes for attachment to S-5 clamps at 3" oc.

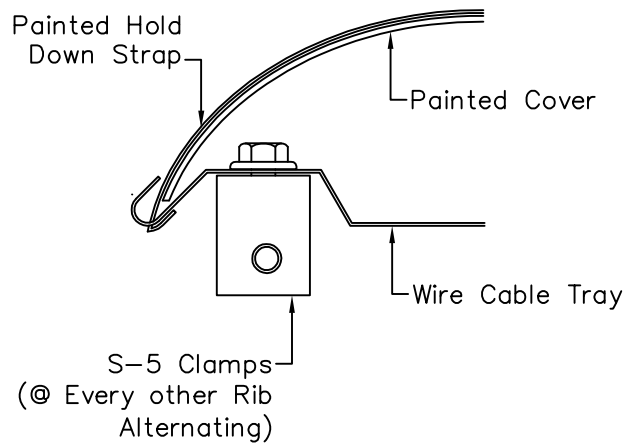

### Detail "A"



Wire Cable Tray  
@ Mid-Roof

May 2008