PAC-TITE ANGULAR FASCIA

STONE BALLAST SINGLE-PLY VERSION

PRODUCT FEATURES

- Unmatched uplift protection in roof edge applications
- Combines superior strength and aesthetics with ease of installation
- Meets stringent performance requirements
- Non-penetrating design eliminates need for stripping in/heat welding
- Superior watertight integrity of the installation
- Extruded aluminum anchor bar securely terminates the membrane
- Extensively tested to exceed industry standards
- Pre-punched holes for precise fastener placement and quick installation
- Slotted holes allow for thermal movement
- Lifetime, 170 mph wind warranty available
- Wide variety of colors and finishes
- Convenient 12' Lengths
- Custom and radius capabilities available
- Reusable and recyclable for reinstallation

MATERIALS

- 37 Stocked PAC-CLAD Finishes – 24 GA Steel
- 18 Stocked PAC-CLAD Finishes – .040 Aluminum
- Mill Finish Aluminum – .040 Aluminum
- Clear and Colored Anodized – .040 Aluminum

ACCESSORIES

- Miters – 90 Degrees and Non-90 Degrees
- Scuppers – Downspout, Spillout and Overflow
- Drainage Components

TESTING

- ANSI/SPRI ES-1 Standard to a design pressure of 290 lbs/ft^2 to comply with the International Building Code
- Factory Mutual 1-645 approved for wind uplift protection

WARRANTY

A Lifetime 170 mph warranty is available. It covers replacement or repair of any portion of the roof edge system that has failed due to a defect in the supplied materials. The warranty covers the roof edge for the lifetime of the roof on which it was originally installed.

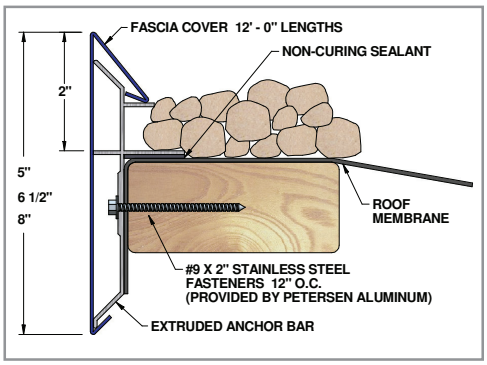

FM APPROVED

SIZES

Face Heights	Nailer Coverage
5"	1 Nailers
6 ½"	2 Nailers
8"	3 Nailers

PAC-CLAD Petersen Aluminum

www.pac-clad.com | 800-PAC-CLAD

©2011 Petersen Aluminum Corporation