

7/8" CORRUGATED - Z-GIRT

TOP-OF-WALL DETAIL - TIE-IN


VERTICAL APPLICATION


7/8" CORRUGATED PANEL

* MAY OMIT SUPPORT PLATE IF ATTACHING TO STRUCTURAL MEMBER

KEYNOTES:

- FASTENERS MUST PENETRATE TOP FLANGE OF "Z" GIRT SUBSTRATE BY 5/8" MINIMUM THREAD LENGTH CLIP SPACING VARIES BASED ON PROJECT SPECIFIC
- LOADS AND/OR LOCAL BUILDING CODES

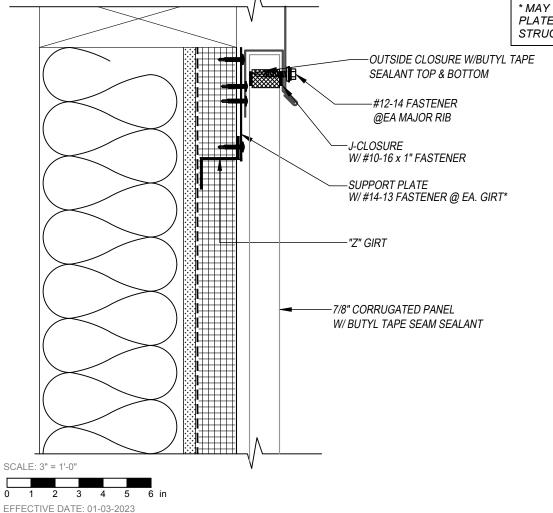



FLASHINGS

DISCLAIMER: DETAIL SHOWN FOR ILLUSTRATION PURPOSES ONLY, ACTUAL PROJECT DETAIL MAY VARY

PETERSEN ALUMINUM CORPORATION - PAC-CLAD.COM

SUBJECT TO CHANGE WITHOUT NOTICE

SALES@PETERSENMAIL.COM