

SNAP-CLAD™

PRODUCT FEATURES

- 20 year non-prorated finish warranty
- Architectural/structural panel
- Herr-Voss corrective leveled
- Factory applied sealant available
- Continuous interlock
- Labor-saving one-piece design
- Stiffener beads available
- Striations available
- Factory eave notching available
- Min of 2:12 pitch
- Tapered panels available
- Max panel length of 64'

MATERIAL


- 37 stocked colors - 24ga.
- 13 stocked colors - 22ga.
- 36 stocked colors - .032 aluminum)
- 18 stocked colors - .040 aluminum
- Panels available in Galvalume Plus and 16 oz copper
- Stucco embossed can be specified

RATINGS/TESTS


- UL-580 Class 90
- UL 1897
- UL 790
- UL 263
- UL 2218
- UL 90
- ASTM E 1592
- ASTM E 283/1680
- ASTM E 331/1646

FLORIDA BUILDING PRODUCT APPROVALS

- FL Product Approval #13549
 - All gauges
- FL Product Approval #10277
 - .040 aluminum
- FL Product Approval #8310
 - 16 oz. copper
- Miami-Dade NOA #07.0301.01
 - 24 ga. steel
- Miami-Dade NOA #07.0320.05
 - .032 aluminum;
- Miami-Dade NOA #07.0320.06
 - .040 aluminum

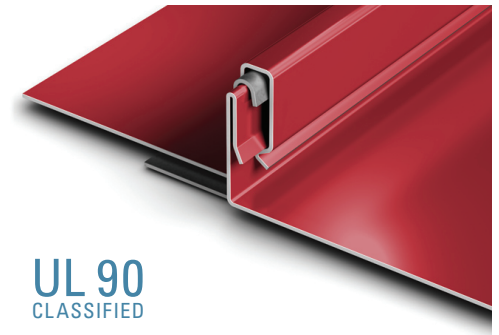

UL 90
CLASSIFIED

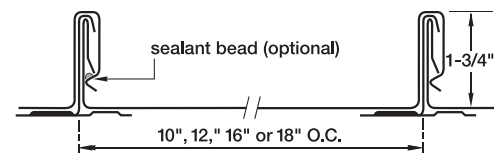

SPECS: 10", 12", 16" OR 18" O.C.*
1-3/4" HIGH

Note: SNAP-CLAD has UL-90 classification up to 16" O.C. on .032 and .040 aluminum and copper. See roof deck construction in Underwriter Laboratories roofing materials and systems directory.



www.pac-clad.com | 800-PAC-CLAD

©2008-2009 Petersen Aluminum Corporation