

TITE-LOC PANEL




MATERIALS

.032 aluminum* 24 gauge steel*
 .040 aluminum* 22 gauge steel*

SPECS

12", 16" or 18" O.C. 2" High

UL-90

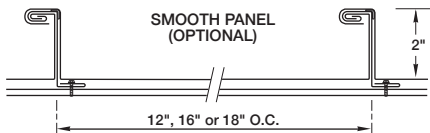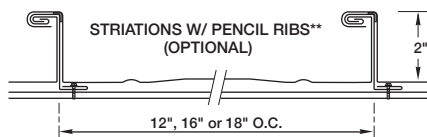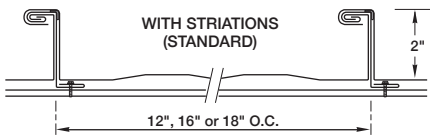

PRODUCT FEATURES

- ▶ Herr-Voss corrective leveled
- ▶ Pencil ribs (stiffening beads) and striations are only available by request
- ▶ 30-year non-prorated finish warranty
- ▶ Maximum factory-produced panel length is 64' (check w/factory for longer lengths)
- ▶ Weathertightness warranty available

MATERIAL

- ▶ 43 stocked colors (24 gauge steel)
- ▶ 15 stocked colors (22 gauge steel)
- ▶ 36 stocked colors (.032 aluminum)

- ▶ 22 stocked colors (.040 aluminum)
- ▶ Galvalume Plus available

UL CLASSIFICATION

- ▶ UL-580 Class 90 rated up to 18" O.C.
- ▶ UL-1897 wind uplift
- ▶ UL-790 Class A fire rated
- ▶ UL-263 fire resistance rated
- ▶ UL-2218 impact resistance rated

TESTS (TITE-LOC PLUS ONLY)

- ▶ 24 Gauge steel SSTD Missile Impact Tested - Passed

- ▶ .032 Aluminum SSTD Missile Impact Tested - Passed

ASTM TESTS

- ▶ ASTM E1592 tested
- ▶ ASTM E331/1646 tested
- ▶ ASTM E283/1680 tested

*24 gauge and 22 gauge steel and .032 and .040 aluminum panels are UL-90 classified over solid substrate. See roof deck construction in Underwriters Laboratories roofing materials and systems directory.

** Not available in all locations. Consult PAC rep for availability.

Not all panel conditions are available in each Petersen branch; additional freight charges might apply if specific panel condition is required. Tite-Loc and Tite-Loc Plus panels are supplied with striations as standard. Customer must advise if additional panel conditions are required.