DRN BY: JJC


CKD BY: SAK

DWG# 41010-21554



WWW.PAC-CLAD.COM

E-MAIL: INFO@PAC-CLAD.COM

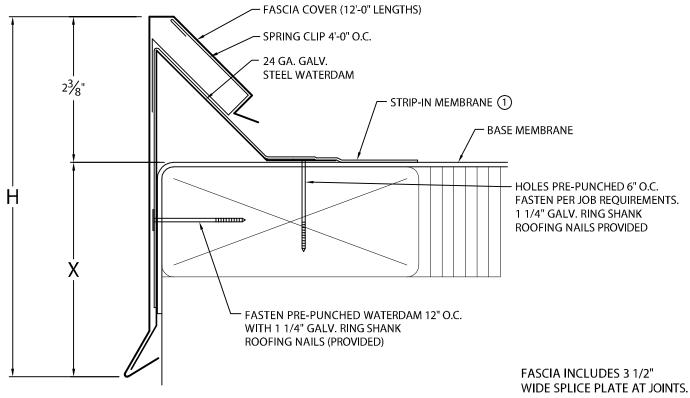

1) Standard Fascia will not function with tpo or PVC Strip-in Membrane Thicker than .060".				MATERIAL:
② OIL CANNING CAN OCCUR ON LARGER FACE HEIGHTS. RECOMMEND .050" OR .063" FOR				24 GA. GALV. STEEL (2)050" (1.27 mm) Alum.
FACE HEIGHTS ABOVE 8½" (3) WELDED ACCESSORIES REQUIRE A MINIMUM OF MATERIAL THICKNESS OF .050"				040" ALUMINUM (2)063" (1.60 mm) Alum.
				OTHER
NOTE: UNLESS OTHERWISE NOTED, FABRICATION OF MITERS AND ACCESSORIES ARE FURNISHED STANDARD.				
				COLOR:FINISH:
PAC-LOC FASCIA 2000 FASCIA DIMENSIONS				QUANTITIES:
PRODUCT	Н	X	NAILER	LINEAU FEET 401 OF LENGTHS
ID. NO.	DIM	DIM	COVERAGE	LINEAL FEET 12'-0" LENGTHS
☐ FA-65	5 1/4" 6 3/4"	2 7/8" 4 3/8"	1 NAILER 2 NAILERS	OUTSIDE MITER(S) @ (°)
☐ FA-80	8 1/4"	5 7/8"	3 NAILERS	INSIDE MITER(S) @ (°) SPECIFY
☐ FA-95	9 3/4"	7 3/8"	4 NAILERS	RIGHT ENDCAP(S)
☐ FA-110	11 1/4"	8 7/8"	5 NAILERS	MELDED (3)
☐ FA-125	12 3/4"	10 3/8"	6 NAILERS	
EA SO TO SA CO ANGLICODI SC A DECICAL DOSCOUDE OF ACC.				RIGHT ENDWALL FLASHING(S)
FA-50 TO FA-80 ANSI/SPRI ES-1 DESIGN PRESSURE OF 160 psf				LEFT ENDWALL FLASHING(S)
FA-95 TO FA-125 ANSI/SPRI ES-1 DESIGN PRESSURE OF 110 psf				OVERFLOW SCUPPER(S) STYLEAB
AUTHORIZED SIGNATURE:				SPILLOUT SCUPPER(S) STYLEAB
AUTHOMIZED SIGNATONE.				DOWNSPOUT SCUPPER(S) STYLEAB
APPROVED BY:				(X) SIZE A: TAPERED 1 1/2" DROP
DATE.				B: FLAT
DATE:				D.TEAT
PROJECT:				
ARCHITECT:				
ROOFING CONTRACTOR:				
REPRESENTATIVE/DISTRIBUTOR:				
PHONE: 800-323-1960 FAX: 800-722-7150				DATE: 04/21/15 SHT.# OF