



NON 90° COPING MITERS


OUTSIDE MITER - OBTUSE

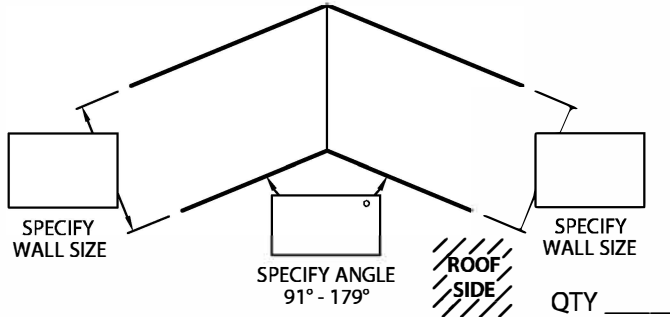


OUTSIDE MITER - ACUTE

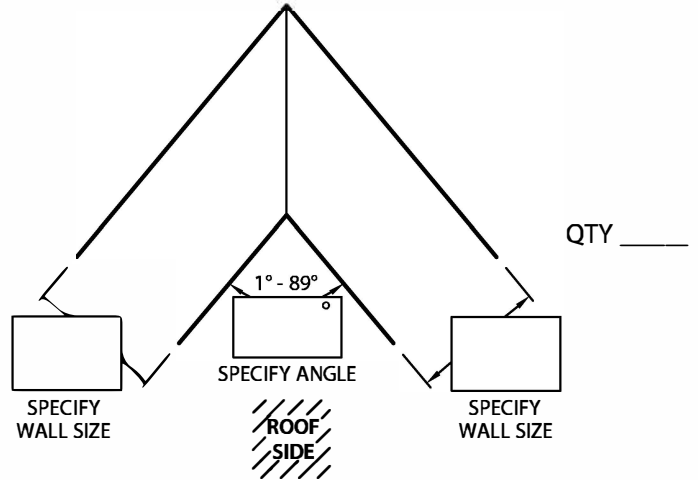

INSIDE MITER - OBTUSE

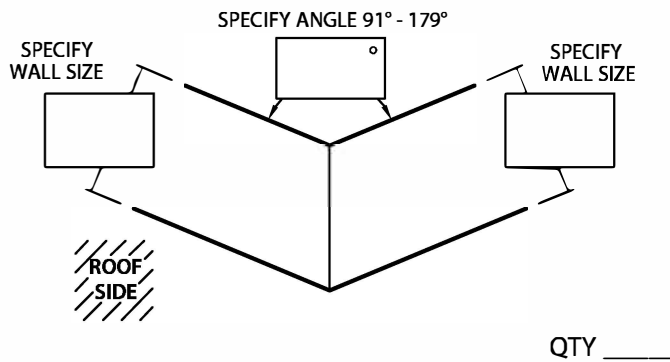

INSIDE MITER - ACUTE

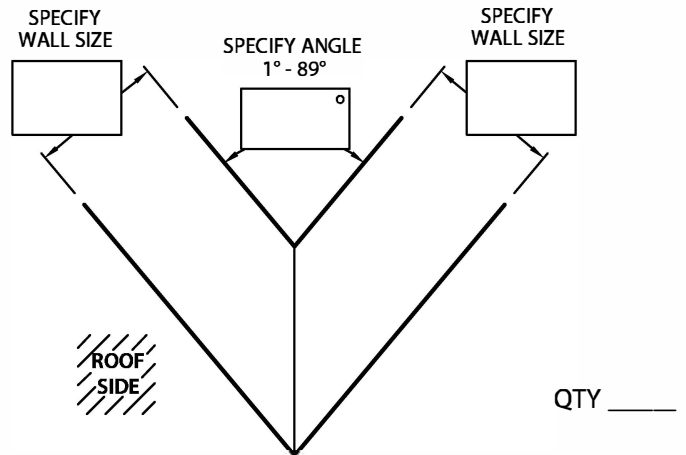

NOTES:

--- FOR CUSTOM LEG LENGTHS MODIFY DRAWING ABOVE.

- ① WELDED ACCESSORIES REQUIRE A MINIMUM MATERIAL THICKNESS OF .050".

MATERIAL:

- ___ 24 GA. GALVANIZED STEEL
- ___ 22 GA. GALVANIZED STEEL
- ___ .040" ALUMINUM
- ___ .050" ALUMINUM
- ___ .063" ALUMINUM
- ___ OTHER _____

SPECIFY ACCESSORY TYPE:

- WELDED ①
- QUICKLOCK

AUTHORIZED SIGNATURE: _____

APPROVED BY: _____

DATE: _____

COLOR: _____

FINISH: _____

PROJECT: _____

ARCHITECT: _____

ROOFING CONTRACTOR: _____

REPRESENTATIVE/DISTRIBUTOR: _____



PHONE: 800-323-1960 FAX: 800-722-7150
 WWW.PAC-CLAD.COM
 E-MAIL: INFO@PAC-CLAD.COM

DATE: 03/06/14

DRN BY: JJC

CKD BY: SAK

SHT.# 1 OF 2

DWG# 41011-12586

A

NON 90° COPING MITERS

RIGHT ANGLES ARE 90°
ACUTE ANGLES RANGE FROM 1° - 89°
OBTUSE ANGLES RANGE FROM 91° - 179°

