

NEGATIVE LOAD TABLE

12" PAC 850, .032" ALUMINUM

12" PAC 850 .032" ALUM


Negative Design Uplift Loads

Span (in)	E330 Load (psf)	Design Load (psf)
1.00	166.40	110.93
1.50	119.60	79.73
2.00	72.80	48.53
2.50	63.70	42.47
3.00	54.60	36.40
3.50	45.50	30.33
4.00	36.40	24.27

Notes:

- 1) The above loads were derived from uplift tests done in accordance with ASTM E330
- 2) All values are interpolated from tests performed at spans of 1'-0" and 4'-0".
- 3) Design Load contains a **1.50 factor of safety** per DADE COUNTY PRODUCT CONTROL.
- 4) Test values were taken from the 29261-2 dated 01-21-10. (CERNY & IVEY ENGINEERS)
Purlin Assembly: 22ga hats
- 5) hats
- 6) Panel Fastener: 1ea #10-16 x 1" #3SD

State of Florida
C.O.A.
23778

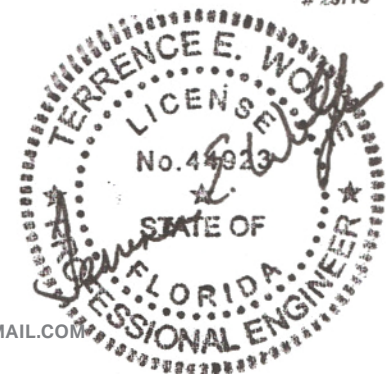

PETERSEN ALUMINUM CORPORATION

PAC-CLAD.COM SALES@PETERSENMAIL.COM

HQ: 1005 Tonne Road
Elk Grove Village, IL 60007
P: 800-PAC-CLAD
F: 800-722-7150

9060 Junction Drive
Annapolis Junction, MD 20701
P: 800-344-1400
F: 301-953-7627

10551 PAC Road
Tyler, TX 75707
P: 800-441-8661
F: 903-581-8592

102 Northpoint Parkway
Acworth, GA 30102
P: 800-272-4482
F: 770-420-2533

1800 S. 7th Ave., Suite 130
Phoenix, AZ 85007
P: 833-750-1935
F: 602-254-6504

1885 Station Parkway, NW, Suite B
Andover, MA 01810
P: 877-571-2025
F: 866-901-2935

MAY 05 2010