
NON 90° ANGLE FOR FASC

MEASUREMENT WORKSHEET FOR USE WITHOUT A PROTRACTOR

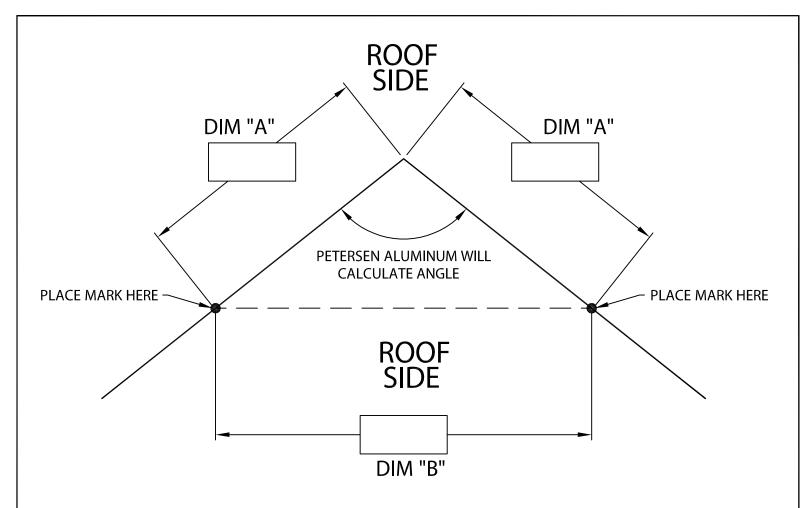

- 1. CIRCLE APPROPRIATE "ROOF SIDE" TO INDICATE OUTSIDE MITER OR INSIDE MITER. THIS DETAIL APPLIES FOR MITERS TIGHTER THEN 90° (ACUTE) OR WIDER THEN 90° (OBTUSE).
- 2. STARTING AT EITHER SIDE OF THE CORNER, MEASURE ALONG THE WALL EDGE A CONVENIENT DIMENSION, SUCH AS 24" OR 36", DEPENDING ON JOB SITE CONDITIONS. PLACE A MARK ON THE WALL AND RECORD MEASURED DIMENSION AS "DIM A" IN THE DRAWING ABOVE, REPEAT PROCEDURE FOR THE OPPOSITE WALL, AS SHOWN ABOVE.
- 3. MEASURE STRAIGHT ACROSS FROM MARK TO MARK, AS SHOWN, AND RECORD THE MEASURED **DIMENSION AS "DIM B".**
- 4. FAX THIS SHEET TO 800-722-7150 WITH ORDER.

DI	D	O	١١	ᄃ	\sim	Г٠
Г	П	u	יני	Ľ	_	١.

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

FARISIE CON

Phone: 800-323-1960 Fax: 800-722-7150

www.pac-clad.com e-mail: info@pac-clad.com DATE: 07/23/10 DRN BY: JJC

OF SHT.#

CKD BY: SAK

DWG# 41810-12107