
PAC-TITE WT FASCIA

FULLY ADHERED OR MECHANICALLY ATTACHED SINGLE-PLY VERSION

ANSI/SPRI ES-1 TESTED

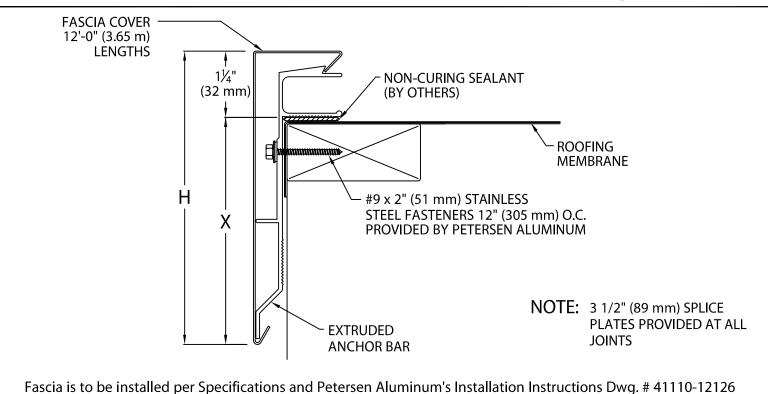

PAC-TITE WT FASCIA MATERIAL: **DIMENSIONS** ____ .050" (1.27 mm) Aluminum PRODUCT Н **NAILER** ID. NO. DIM DIM **COVERAGE** .063" (1.60 mm) Aluminum ☐ HG-AF-40 4" (102 mm) 2 3/4" (70 mm) 1 NAILER ____ OTHER ______ ☐ HG-AF-55 5 1/2" (140 mm) 4 1/4" (108 mm) 2 NAILERS Color: ☐ HG-AF-70 7" (178 mm) 5 3/4" (146 mm) 3 NAILERS Finish: Fabrication will proceed only after receipt of signed print approval. **OUANTITIES:** Print Approval: Lineal Feet 12'-0" (3.65 m) Lengths ____ Outside Miters @ (_____°) Architect and/or contractor shall verify all _____ Inside Miters @ (_ °) dimensions, sizes and quantities. All _____ Overflow Scupper Style___A___B products to be installed in strict accordance with Petersen Aluminum's printed instructions. _Spillout Scupper Style____A___B Downspout Scupper Style____A___B Approved by: (____X___) Size A: Tapered 1 1/2" (38 mm) Drop Date:

PAC-CLAD							
Р			E				
A CARLIELE COMPANY							

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

PROJECT:

ARCHITECT:

Phone: 800-323-1960 Fax: 800-722-7150

www.pac-clad.com e-mail: info@pac-clad.com DATE: 07/23/10 SHT.#_
DRN BY: JJC
CKD BY: SAK
DWG# 4101

DWG# 41010-12125

OF