
PAC-TITE LT CORRUGATED DOWNSPOUT OFFSET

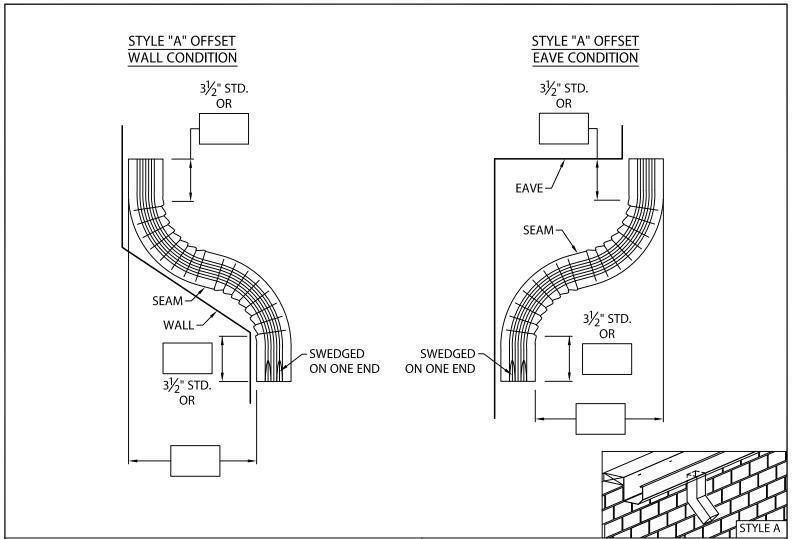

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Petersen Aluminum's printed instructions.

Approved by:	
Date:	

MATERIAL:

24 GA. GALV. STEEL

_.032" ALUMINUM

OTHER

COLOR: FINISH:_

QUANTITIES:

STYLE "A" OFFSET WALL CONDITION

STYLE "A" OFFSET EAVE CONDITION

PICK ONE:

3" x 4" DOWNSPOUT ____ 4" x 5" DOWNSPOUT ____

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:



Phone: 800-323-1960 Fax: 800-722-7150

www.pac-clad.com e-mail: info@pac-clad.com DATE: 03/18/21 DRN BY: ZS

CKD BY: MM

DWG# 41013-35936

SHT.#

OF