


PAC-TITE GOLD 24 GA. / .040" MATERIAL ANSI/SPRI GT-1 TESTED 150 LBS / SQ FT

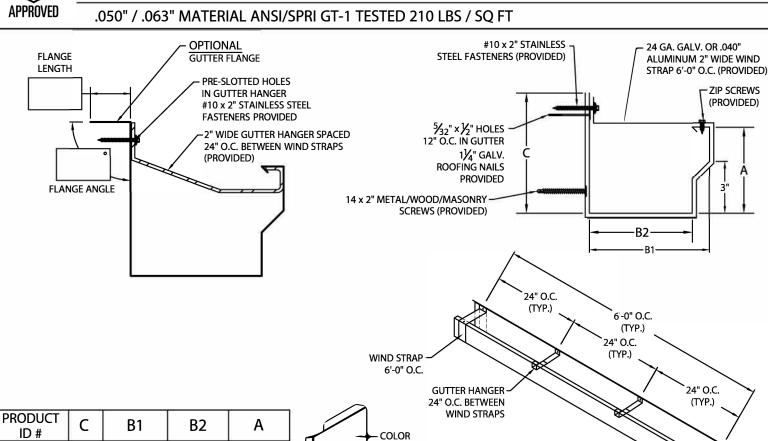

SIDE

ENDCAP DETAIL

(LEFT HAND SHOWN)

☐ IGG1-C9 **NOTES:**

☐ IGG1-C6

☐ IGG1-C7

☐ IGG1-C8

- -- MAXIMUM DOWNSPOUT DIMENSION NOT TO EXCEED "B2" MINUS 9/16".
- 6" WIDE SPLICE PLATES PROVIDED.

6"

7"

8"

4 3/4"

6"

7"

8"

- -- 1/8" STAINLESS STEEL POP RIVETS PROVIDED.
- -- UNLESS OTHERWISE NOTED, FABRICATION OF MITERS ARE FURNISHED STANDARD UTILIZING A NON-PENETRATING QUICKLOCK JOINT, THEN FACTORY SEALED WATERTIGHT.

3 3/4"

5"

6"

7"

4 1/2"

6"

7"

8"

-- WELDED ACCESSORIES REQUIRE A MINIMUM MATERIAL THICKNESS OF .050".

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Petersen Aluminum's printed instructions.

Approved by:	

٨	Λ	Δ	Т	F	QΙ	Δ	١.

- 24 GA. GALVANIZED STEEL
 - .040" ALUMIINUM COLOR:
- .050" ALUMINUM
- .063" ALUMINUM
 - **OTHER**

OUANTITIES:

- LINEAL FEET 12'-0" LENGTHS
- **OUTSIDE MITERS @ 90°**
 - **INSIDE MITERS @ 90°**
- RIGHT ENDCAPS
- LEFT ENDCAPS
- **EXPANSION JOINTS STYLE "1"**
- **EXPANSION JOINTS STYLE "2"**
- FOR NON-90 MITERS SEE PRINT APPROVAL #41012-15305

GUTTER HANGER SPACING DETAIL

FINISH:_

PROJECT:

Date: __

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:



Phone: 800-323-1960 Fax: 800-722-7150

www.pac-clad.com e-mail: info@pac-clad.com DATE: 03/18/21

CKD BY: MM

DRN BY: ZS

DWG# 41012-35930

SHT.# OF

SPECIFY

MITER TYPE:

☐ WELDED

☐ QUICKLOCK