


PAC-TITE GOLD

24 GA. / .040" MATERIAL ANSI/SPRI GT-1 TESTED 150 LBS / SQ FT

IGG-2 VFRSION

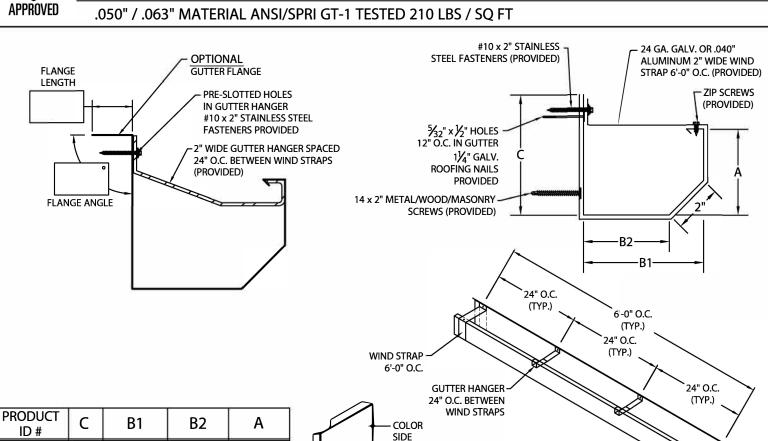

☐ IGG2-C9 NOTES:

☐ IGG2-C6

☐ IGG2-C7

☐ IGG2-C8

- -- MAXIMUM DOWNSPOUT DIMENSION NOT TO EXCEED "B2" MINUS 9/16".
- -- 6" WIDE SPLICE PLATES PROVIDED.

6"

7"

8"

- -- 1/8" STAINLESS STEEL POP RIVETS PROVIDED.
- -- UNLESS OTHERWISE NOTED, FABRICATION OF MITERS ARE FURNISHED STANDARD UTILIZING A NON-PENETRATING QUICKLOCK JOINT, THEN FACTORY SEALED WATERTIGHT.

3 9/16"

4 9/16"

5 9/16"

6 9/16"

4 1/2"

6"

7"

8"

ENDCAP DETAIL (LEFT HAND SHOWN)

-- WELDED ACCESSORIES REQUIRE A MINIMUM MATERIAL THICKNESS OF .050".

Fabrication will proceed only after receipt of signed print approval.

5"

6"

7"

8"

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Petersen Aluminum's printed instructions.

Approved by.	
Date:	

Λ/	1٨	T		DI	Δ	
11/			_	п.	_	

- ___ 24 GA. GALVANIZED STEEL
 - _ .040" ALUMINUM COLOR:
- .050" ALUMINUM
- ____.063" ALUMINUM
 - OTHER _____

OUANTITIES:

_____ LINEAL FEET 12'-0" LENGTHS

- OUTSIDE MITERS @ 90°
- INSIDE MITERS @ 90°
- ___ RIGHT ENDCAPS
- LEST SUBSADS
 - ___ LEFT ENDCAPS
 - EXPANSION JOINTS STYLE "1"
- ____ EXPANSION JOINTS STYLE "2"

FOR NON-90 MITERS SEE PRINT APPROVAL #41012-15305

PROJECT:

ARCHITECT:

Approved by

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:



Phone: 800-323-1960 Fax: 800-722-7150

www.pac-clad.com e-mail: info@pac-clad.com DATE:03/18/21

21 SHT.#

GUTTER HANGER SPACING DETAIL

FINISH:_

OF

DRN BY: ZS CKD BY: MM

DWG# 41012-35931

SPECIFY

MITER TYPE:

☐ WELDED

☐ QUICKLOCK