
PAC-TITE GOLD G

24 GA. / .040" MATERIAL ANSI/SPRI GT-1 TESTED 150 LBS / SQ FT

.050" / .063" MATERIAL ANSI/SPRI GT-1 TESTED 210 LBS / SQ FT

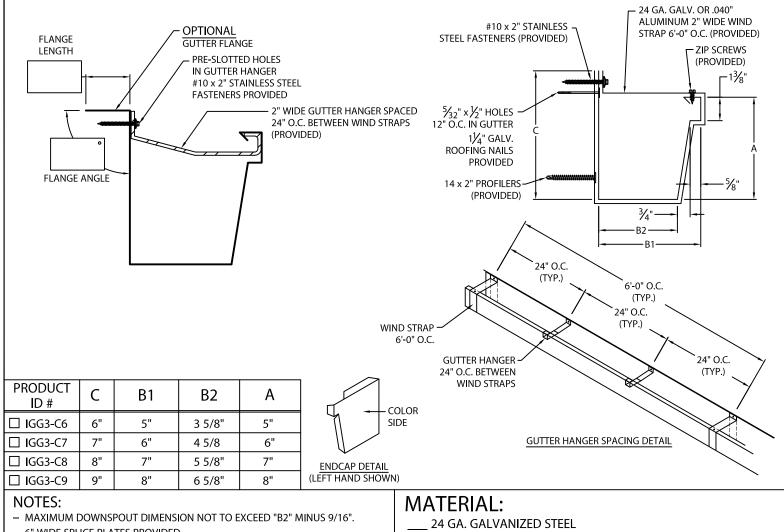

- 6" WIDE SPLICE PLATES PROVIDED.
- 1/8" STAINLESS STEEL POP RIVETS PROVIDED.
- -- UNLESS OTHERWISE NOTED, FABRICATION OF MITERS ARE FURNISHED STANDARD UTILIZING A NON-PENETRATING QUICKLOCK JOINT, THEN FACTORY SEALED WATERTIGHT.
- WELDED ACCESSORIES REQUIRE A MINIMUM MATERIAL THICKNESS OF .050".

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Petersen Aluminum's printed instructions.

Approved by:	
Date:	

- ___.040" ALUMIINUM
- .050" ALUMINUM
- .063" ALUMINUM
 - OTHER

OUANTITIES:

LINEAL FEET 12'-0" LENGTHS

- **OUTSIDE MITERS @ 90°**
- **INSIDE MITERS @ 90°**
- **RIGHT ENDCAPS**
- LEFT ENDCAPS
- **EXPANSION JOINTS STYLE "1"**
- **EXPANSION JOINTS STYLE "2"**
- FOR NON-90 MITERS SEE PRINT APPROVAL #41012-15305

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:



Phone: 800-323-1960 Fax: 800-722-7150

www.pac-clad.com e-mail: info@pac-clad.com DATE: 03/18/21

CKD BY: MM

DRN BY: ZS

COLOR:

FINISH:

OF

SHT.#

SPECIFY

MITER TYPE:

☐ WELDED

☐ QUICKLOCK

DWG# 41012-35517