






PAC-TITE GOLD GUTTER


24 GA. / .040" MATERIAL ANSI/SPRI GT-1 TESTED 150 LBS / SQ FT

IGG-B VERSION

.050" / .063" MATERIAL ANSI/SPRI GT-1 TESTED 210 LBS / SQ FT

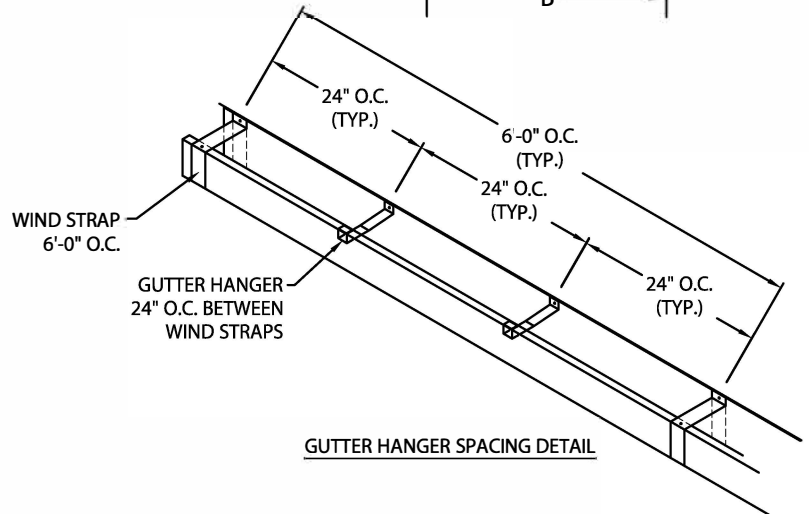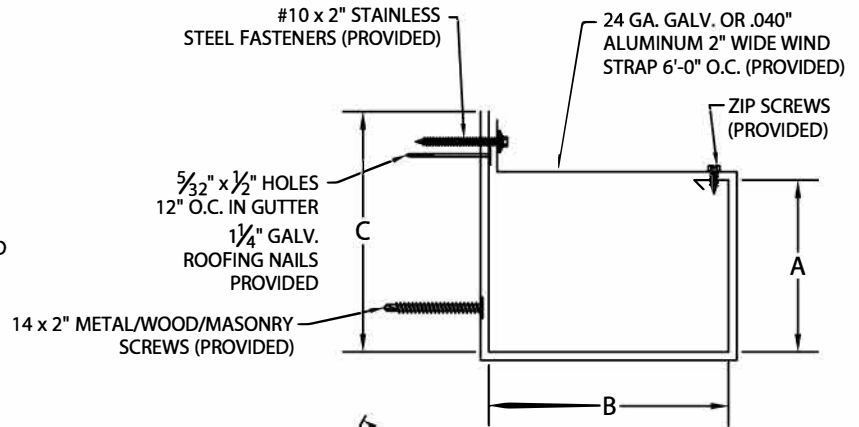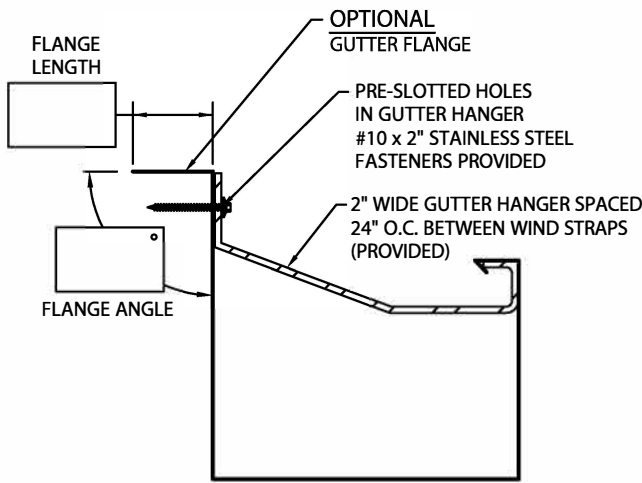

PRODUCT ID #	C	B	A
<input type="checkbox"/> IGGB-C6	6"	4 1/8"	4 1/2"
<input type="checkbox"/> IGGB-C7	7"	6"	6"
<input type="checkbox"/> IGGB-C8	8"	7"	7"
<input type="checkbox"/> IGGB-C9	9"	8"	8"



NOTES:

- MAXIMUM DOWNSPOUT DIMENSION NOT TO EXCEED "B" MINUS 9/16".
- 6" WIDE SPLICE PLATES PROVIDED.
- 1/8" STAINLESS STEEL POP RIVETS PROVIDED.
- UNLESS OTHERWISE NOTED, FABRICATION OF MITERS ARE FURNISHED STANDARD UTILIZING A NON-PENETRATING QUICKLOCK JOINT, THEN FACTORY SEALED WATERTIGHT.
- WELDED ACCESSORIES REQUIRE A MINIMUM MATERIAL THICKNESS OF .050".

MATERIAL:

- ___ 24 GA. GALVANIZED STEEL
- ___ .040" ALUMIINUM COLOR: _____
- ___ .050" ALUMINUM FINISH: _____
- ___ .063" ALUMINUM
- ___ OTHER _____

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Petersen Aluminum's printed instructions.

Approved by: _____

Date: _____

QUANTITIES:

- ___ LINEAL FEET 12'-0" LENGTHS
- ___ OUTSIDE MITERS @ 90°
- ___ INSIDE MITERS @ 90°
- ___ RIGHT ENDCAPS
- ___ LEFT ENDCAPS
- ___ EXPANSION JOINTS STYLE "1"
- ___ EXPANSION JOINTS STYLE "2"

SPECIFY MITER TYPE:

- WELDED
- QUICKLOCK

FOR NON-90 MITERS SEE PRINT APPROVAL #41012-15305

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:



Phone: 800-323-1960 Fax: 800-722-7150
 www.pac-clad.com
 e-mail: info@pac-clad.com

DATE: 03/18/21
 DRN BY: ZS
 CKD BY: MM

SHT.# ____ OF ____
 DWG# 41012-35932 A