


# PAC-TITE LT GUTTER-K-STYLE

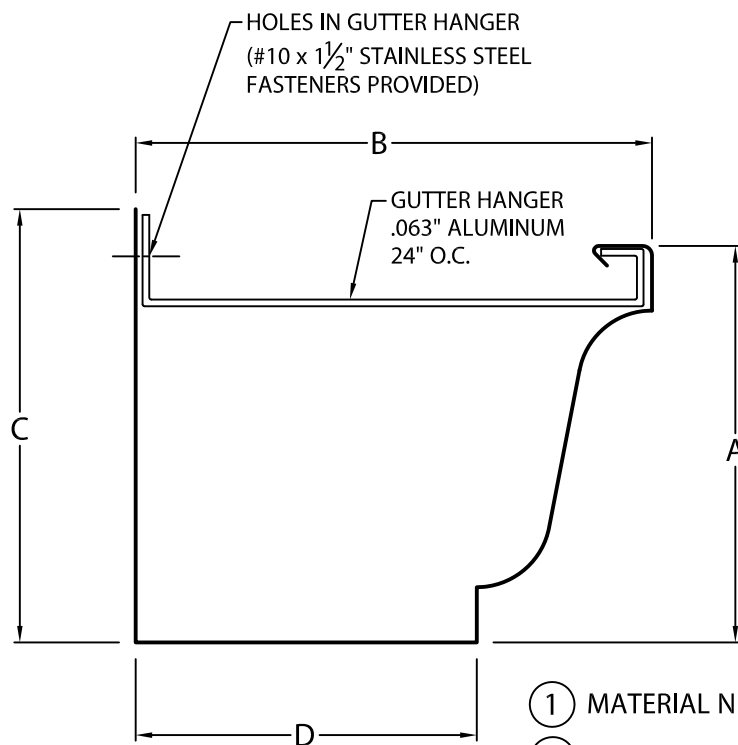

- ① MATERIAL NEEDS FIELD NOTCHED LAP JOINTS.
- ② MATERIAL PROVIDED WITH 6" WIDE SPLICE PLATES.

## MATERIAL:

24 GA. GALV. STEEL ①  
 22 GA. GALV. STEEL ①  
 .032" ALUMINUM ①  
 .040" ALUMINUM ①  
 .050" ALUMINUM ②  
 OTHER \_\_\_\_\_

COLOR: \_\_\_\_\_

FINISH: \_\_\_\_\_

## QUANTITIES:

\_\_\_\_\_ LINEAL FEET 10'-0" LENGTHS  
 \_\_\_\_\_ LINEAL FEET 20'-0" LENGTHS  
 \_\_\_\_\_ PIECES @ \_\_\_\_\_ LENGTHS  
 \_\_\_\_\_ OUTSIDE MITERS @ 90°  
 \_\_\_\_\_ INSIDE MITERS @ 90°  
 \_\_\_\_\_ ENDCAPS: RIGHT \_\_\_\_\_ LEFT \_\_\_\_\_  
 \_\_\_\_\_ EXPANSION JOINTS

ONE EXPANSION JOINT INCLUDES:

(2) ENDCAPS, (1) OUTSIDE COVER PLATE AND (1) TOP PLATE

FOR NON-90 MITERS SEE PRINT APPROVAL #41012-35934

GUTTER SIZE	A	B	C	D
<input type="checkbox"/> 6"	4 1/2"	6"	5"	3 7/8"
<input type="checkbox"/> 7"	5 3/8"	7"	5 7/8"	4 5/8"
<input type="checkbox"/> 8"	6"	8"	6 1/8"	5 3/8"

## NOTES:

- 6" SPLICE PLATES PROVIDED.
- 1/8" STAINLESS STEEL POP RIVETS PROVIDED.
- UNLESS OTHERWISE NOTED, FABRICATION OF MITERS ARE FURNISHED STANDARD UTILIZING POP RIVETS, THEN FACTORY SEALED WATERTIGHT.
- WELDED ACCESSORIES REQUIRE A MINIMUM MATERIAL THICKNESS OF .050".

## AUTHORIZED SIGNATURE:

APPROVED BY: \_\_\_\_\_

DATE: \_\_\_\_\_

PROJECT: \_\_\_\_\_

ARCHITECT: \_\_\_\_\_

ROOFING CONTRACTOR: \_\_\_\_\_

REPRESENTATIVE/DISTRIBUTOR: \_\_\_\_\_



PHONE: 800-323-1960 FAX: 800-722-7150  
 WWW.PAC-CLAD.COM  
 E-MAIL: INFO@PAC-CLAD.COM

DATE: 03/18/21

DRN BY: ZS

CKD BY: MM

SHT.# \_\_\_\_\_ OF \_\_\_\_\_

DWG# 41012-35933

A