



Wall Fastener Pattern

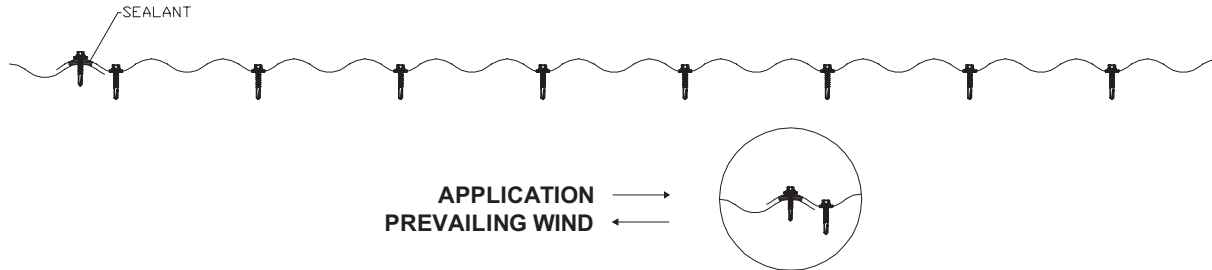

Roof Fastener Pattern

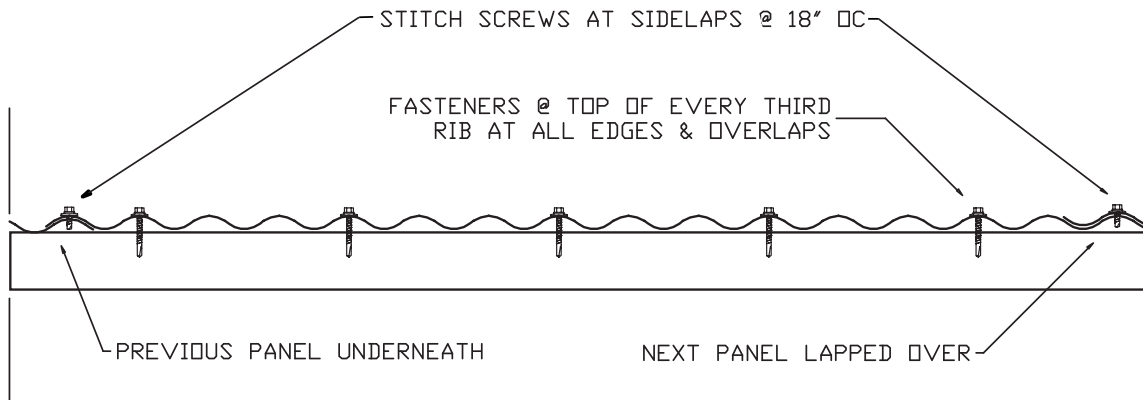

NOTE:

1. Panels should always be lapped against prevailing winds.
2. The above fastening patterns are typical and may not be appropriate for all applications. Consult a Professional Engineer for specific requirements.
3. 1/8" x 1/2" tape sealant shall be used at all side laps when used as a roof panel.
4. Side lap fasteners are required. Typical soacing ia 18", however this spacing may bot be appropriate for all applications. Consult a Professional Engineer for specific requirements.
5. When using this panel in roofing application, it should be lapped wtwo corrugations. Panel may be lapped one corrugation when used in a siding application.
6. DO NOT USE NAILS FOR ANY PANEL ATTACHMENT.

JOB NAME	NOTES
DATE	
CONTRACTOR	