



7.2 PANEL - Z-GIRT INSIDE CORNER DETAIL HORIZONTAL APPLICATION




*** MAY OMIT SUPPORT PLATE IF ATTACHING TO STRUCTURAL MEMBER**

- KEYNOTES:**
- FASTENERS MUST PENETRATE TOP FLANGE OF "Z" PURLIN SUBSTRATE BY 5/8" MINIMUM THREAD LENGTH
 - CLIP SPACING VARIES BASED ON PROJECT SPECIFIC LOADS AND/OR LOCAL BUILDING CODES

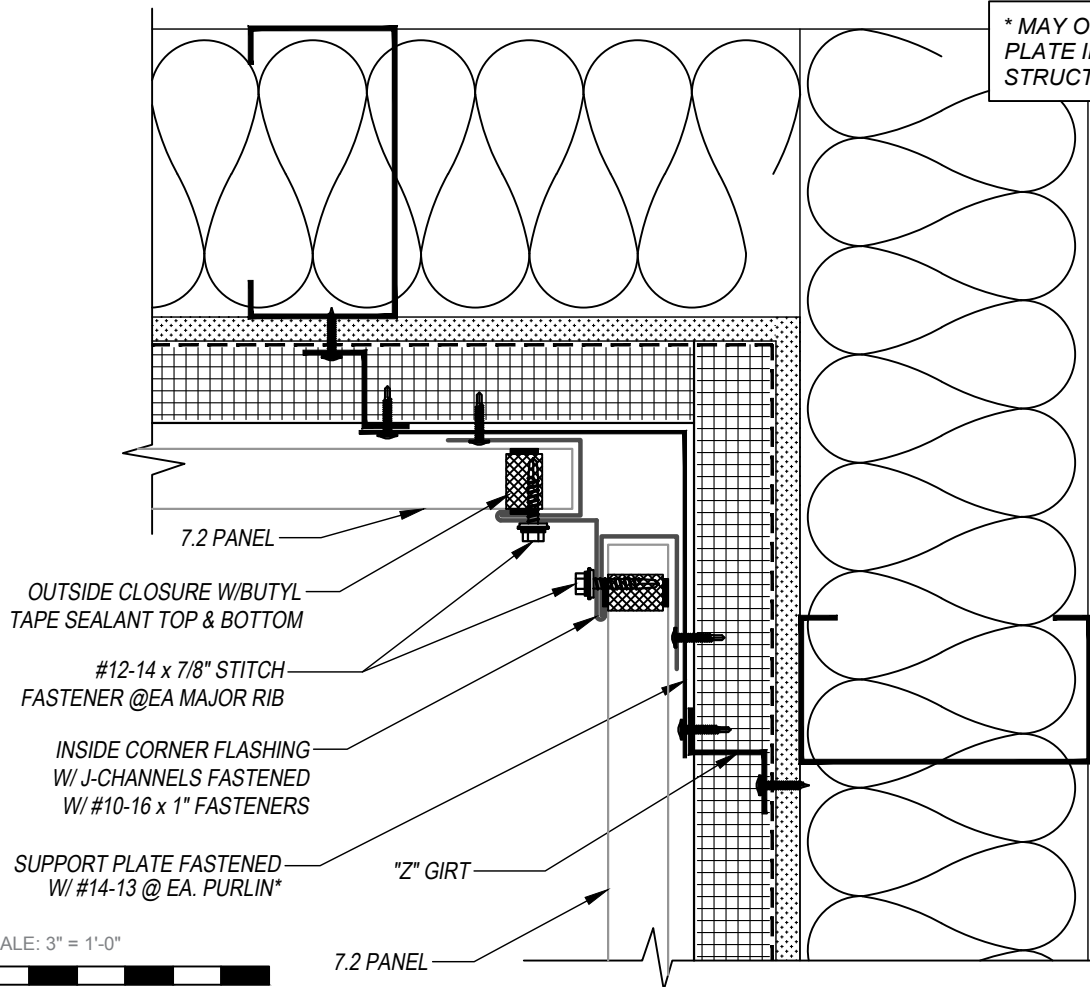

EFFECTIVE DATE: 01-03-2023
SUBJECT TO CHANGE WITHOUT NOTICE

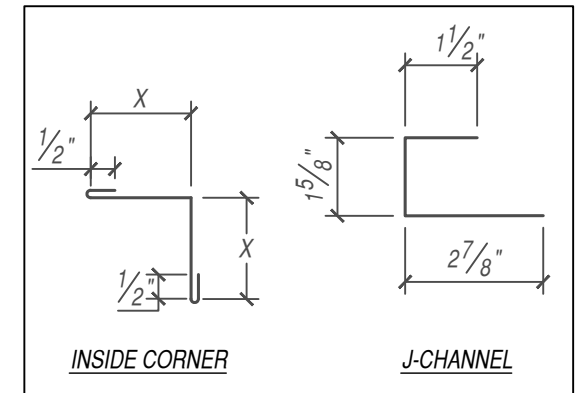

FLASHINGS

DISCLAIMER: DETAIL SHOWN FOR ILLUSTRATION PURPOSES ONLY. ACTUAL PROJECT DETAIL MAY VARY