

PAC-CLAD HT UNDERLAYMENT

SCALE: 3" = 1'-0"

EFFECTIVE DATE: 01-03-2023

SUBJECT TO CHANGE WITHOUT NOTICE

(HIGH TEMP)

WOOD SUBSTRATE-

#10-13 x 1" GP FASTENER -

HIGH SNAP-ON STANDING SEAM - WOOD SUBSTRATE DETAILS

RETURN OVER RETAINER CLIP

GUTTER FLANGE J-CHANNEL

GUTTER STRAP

(FIELD FORMED)

#10-13 x 1" GP FASTENER

-FLUSH WALL PANEL

(SEE DETAIL "A")


GUTTER - OPTION 3 (WITH FLANGE OVER FLUSH WALL PANEL)



-HIGH SNAP-ON STANDING SEAM CAP -HIGH SNAP-ON STANDING SEAM CLIP W/ 2- #10-13 GP FASTENERS (MAX. 8" FROM EAVE) -HIGH SNAP-ON STANDING SEAM PANEL -PAC-CLAD HT UNDERLAYMENT (HIGH TEMP) (STRIP-IN) -RETAINER CLIP DETAIL "A" SET IN BUTYL SEALANT -#10-13 x 1" GP FASTENER -FIELD CUT & BEND RETURN IN PANEL. APPLY SEALANT & HOOK

KEYNOTES:

- TRIM FASTENERS ARE SELF-TAPPING PANCAKE HEAD AND MUST BE INSTALLED IN A STAGGERED PATTERN
- CLIP FASTENERS MUST PENETRATE WOOD SUBSTRATE BY 5/8" MINIMUM THREAD LENGTH
- FASTENER SPACING VARIES BASED ON PROJECT SPECIFIC LOADS AND/OR LOCAL BUILDING CODES

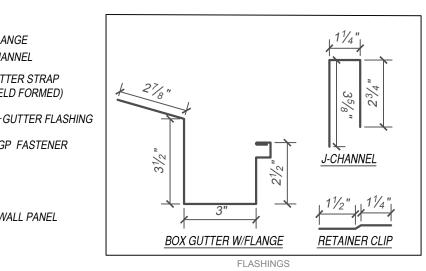

DISCLAIMER: DETAIL SHOWN FOR ILLUSTRATION PURPOSES ONLY, ACTUAL PROJECT DETAIL MAY VARY

PETERSEN ALUMINUM CORPORATION - PAC-CLAD.COM

SALES@PETERSENMAIL.COM