



## SPLICE DETAIL

**VERTICAL APPLICATION** 




\* MAY OMIT SUPPORT PLATE IF ATTACHING TO STRUCTURAL MEMBER

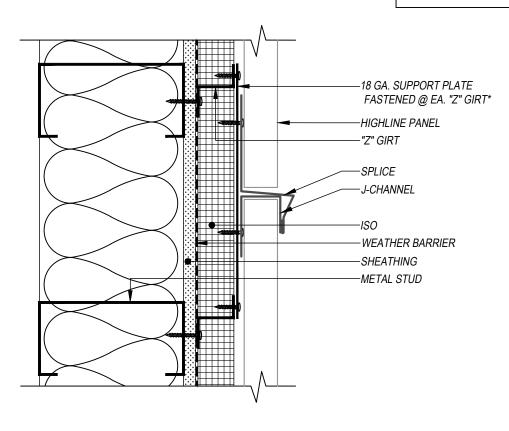



## KEYNOTES:

- TRIM FASTENERS ARE SELF-DRILL PANCAKE HEAD AND MUST BE INSTALLED IN A STAGGERED PATTERN
- · FASTENERS MUST PENETRATE STEEL SUBSTRATE BY 5/8" MINIMUM THREAD LENGTH



FLASHINGS

DISCLAIMER: DETAIL SHOWN FOR ILLUSTRATION PURPOSES ONLY. ACTUAL PROJECT DETAIL MAY VARY

## 0 1 2 3 4 5 6 in

SCALE: 3" = 1'-0"

EFFECTIVE DATE: 01-03-2023 SUBJECT TO CHANGE WITHOUT NOTICE