



T-250 - METAL DECK / ISO SUBSTRATE DETAILS PEAK - OPTION 1 (1/2 RIDGE - HIGH PEAK SIDE)




KEYNOTES:

- TRIM FASTENERS ARE SELF-TAPPING PANCAKE HEAD AND MUST BE INSTALLED IN A STAGGERED PATTERN
- CLIP FASTENERS MUST PENETRATE TOP FLUTE OF METAL DECK SUBSTRATE BY 5/8" MINIMUM THREAD LENGTH
- FASTENER SPACING VARIES BASED ON PROJECT SPECIFIC LOADS AND/OR LOCAL BUILDING CODES

WOOD BLOCKING OPTION

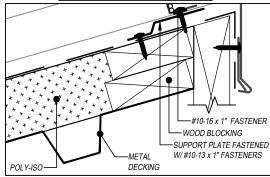

Z-CLOSURE

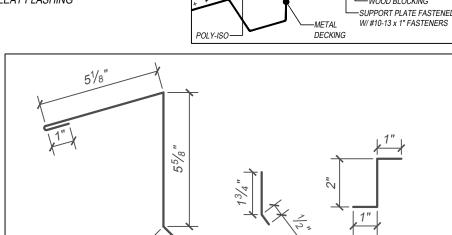

FLASHINGS

CLEAT

DISCLAIMER: DETAIL SHOWN FOR ILLUSTRATION PURPOSES ONLY, ACTUAL PROJECT DETAIL MAY VARY

SEALANT (AT VERTICAL LEG & UNDER "Z") SUPPORT PLATE FASTENED W/ #14-13 FASTENERS T-250 PANEL PEAK FLASHING SUPPORT PLATE FASTENED W/#10-16 FASTENERS #10-13 x 5/8" GP FASTENER CLEAT FLASHING

0 1 2 3 4 5 6 in EFFECTIVE DATE: 01-03-2023

SCALE: 3" = 1'-0"

EFFECTIVE DATE: 01-03-2023 SUBJECT TO CHANGE WITHOUT NOTICE

PETERSEN ALUMINUM CORPORATION - PAC-CLAD.COM

#10-16 x 1" FASTENER (SEE "Z"CLOSURE DETAIL)

PAC-CLAD HT UNDERLAYMENT

(HIGH TEMP)

PEAK