



R-36 PANEL - Z-GIRT  
**TOP-OF-WALL DETAIL**  
HORIZONTAL APPLICATION

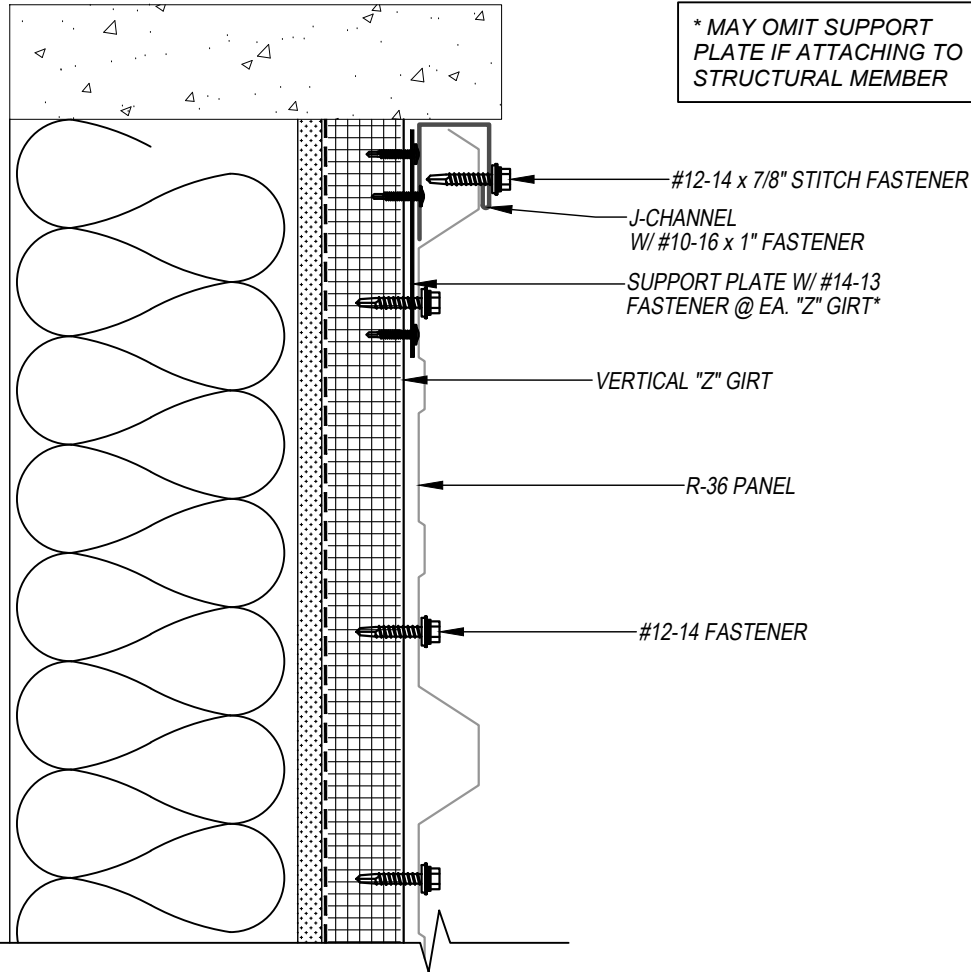


**KEYNOTES:**

- FASTENERS MUST PENETRATE TOP FLANGE OF "Z" GIRTS SUBSTRATE BY 5/8" MINIMUM THREAD LENGTH
- CLIP SPACING VARIES BASED ON PROJECT SPECIFIC LOADS AND/OR LOCAL BUILDING CODES

SCALE: 3" = 1'-0"



EFFECTIVE DATE: 01-03-2023  
SUBJECT TO CHANGE WITHOUT NOTICE

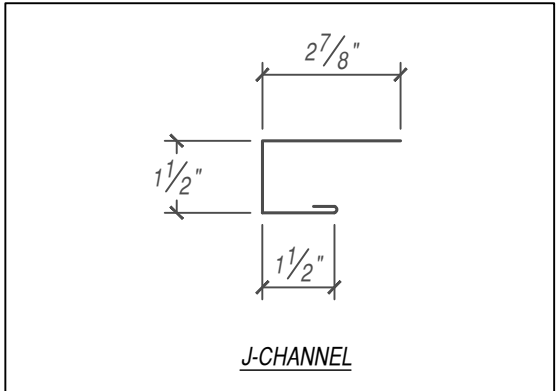

FLASHINGS

DISCLAIMER: DETAIL SHOWN FOR ILLUSTRATION PURPOSES ONLY. ACTUAL PROJECT DETAIL MAY VARY