


PAC-Shield Polyiso Roofing Products



PAC-SHIELD

Flat Insulation with Fiber Reinforced Facer


- ▶ Available in 4' x 4' and 4' x 8' and in 20 or 25 PSI
- ▶ UL Class A and FM Class 1
- ▶ Highest Recycled Content
- ▶ Applications: Standing Seam Metal, BUR, Modified Bitumen, Cold Applied Single-Ply Systems: Ballasted, Mechanically Attached, Fully Adhered

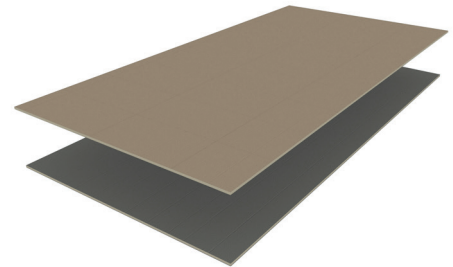

PAC-SHIELD COATED GLASS

Flat Insulation with Premium Performance Facer

- ▶ Available in 4' x 4' and 4' x 8' and in 20 or 25 PSI
- ▶ UL Class A and FM Class 1
- ▶ Mold resistant facer, 9% pre-consumer recycled content
- ▶ Increased moisture resistance and dimensionally stability
- ▶ Achieves a UL Class A combustible deck assembly rating without the use of a fire rated slip sheet or gypsum cover board when applied at a thickness of 1" or greater. Insulation joints must be staggered a minimum of 12" from the combustible deck joints. Maximum roof slope = 1/2":12"
- ▶ Manufactured with light and dark sides to allow for faster or slower adhesive flash-off times in Single-Ply Fully Adhered systems.
- ▶ Applications: Standing Seam Metal, BUR, Modified Bitumen, Cold Applied Single-Ply Systems: Ballasted, Mechanically Attached, Fully Adhered, Liquid Applied Membrane, Spray Foam Adhered systems.

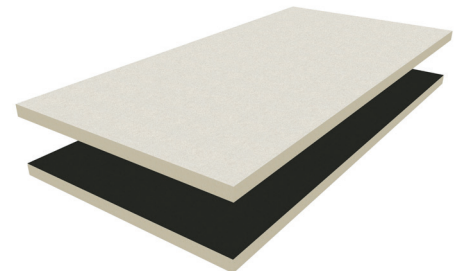

PAC-SHIELD NAILBASE

Manufactured to Oriented Strand Board or Plywood

- ▶ Manufactured on-line to OSB available in 47.5" x 47.5" or 47.5 x 95.5 sizes 1.5" – 4.1" R-value 6.3 – 21.1
- ▶ Manufactured off-line to Plywood available 48" x 96" sizes 1.6" – 4.2"
- ▶ R-values 6.3 – 21.1
- ▶ Available 20 or 25 PSI
- ▶ UL Class A and FM Class 1
- ▶ Not a structural panel
- ▶ Applications: Standing Seam Metal Roof Systems, Low Slope, and Heavyweight Shingles.

