
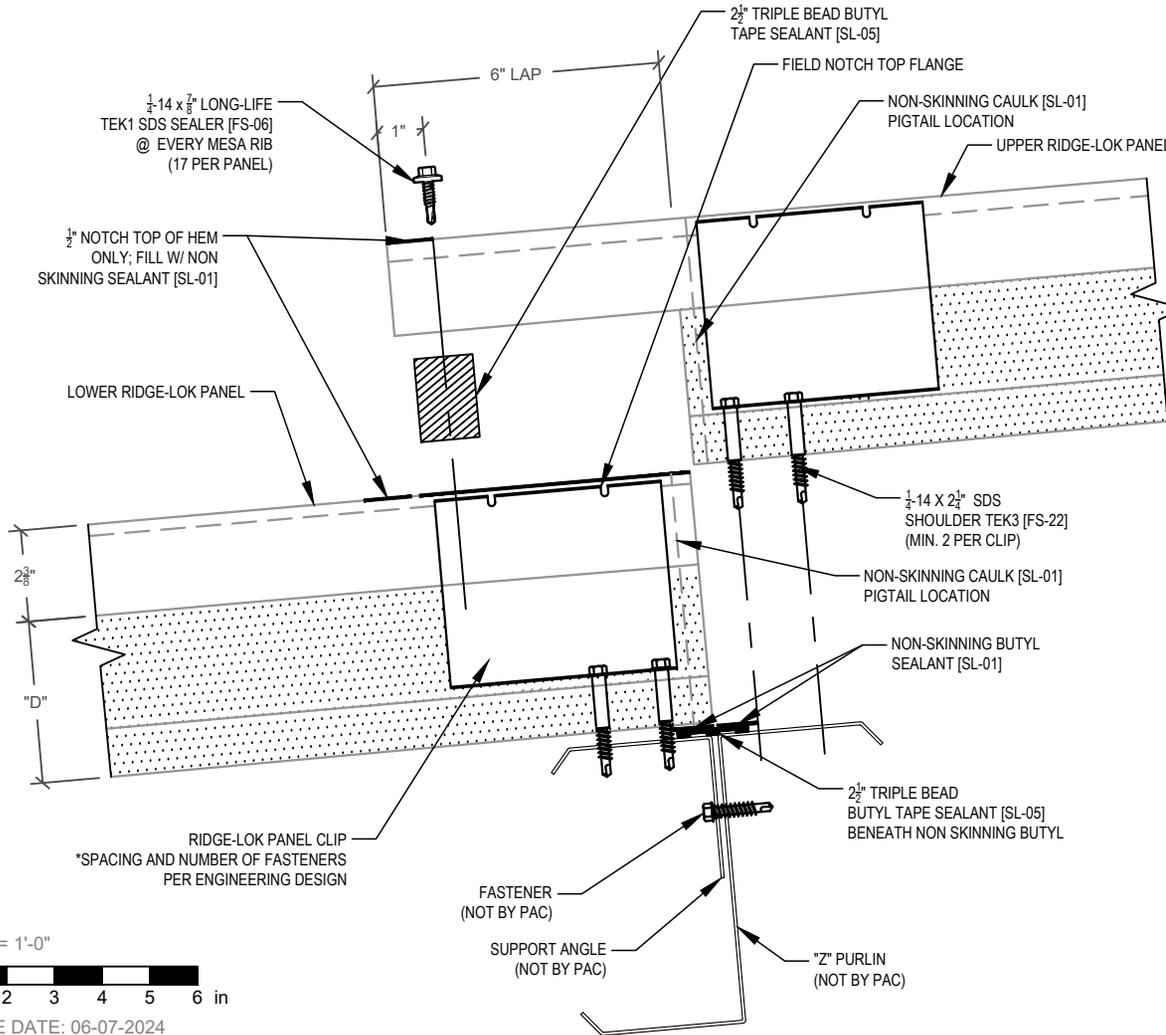



RIDGE-LOK INSULATED METAL PANEL OPEN FRAMING DETAILS ENDLAP - OPTION 1 DETAIL



KEYNOTES:

- "D" = ROOF PANEL THICKNESS
(AVAILABLE THICKNESS = 2.5", 3", 4", 5" OR 6")
- DIMENSIONS SHOW ARE FOR 3" THICK ROOF PANEL.
ADJUST DIMENSION PROPORTIONALLY FOR OTHER
ROOF PANELS THICKNESS.
- CLIP FASTENERS MUST PENETRATE TOP FLANGE OF "Z"
PURLIN SUBSTRATE BY 5/8" MINIMUM THREAD LENGTH
- CLIP SPACING VARIES BASED ON PROJECT SPECIFIC
LOADS AND/OR LOCAL BUILDING CODES
- FILLER INSULATION MATERIAL AND APPLICATION
SPECIFIED BY ARCHITECT
- ENDLAPS MUST BE STAGGERED; FOUR CORNER
ENDLAPS ARE NOT PERMITTED

SCALE: 3" = 1'-0"



EFFECTIVE DATE: 06-07-2024
SUBJECT TO CHANGE WITHOUT NOTICE

DISCLAIMER: DETAIL SHOWN FOR ILLUSTRATION PURPOSES ONLY. ACTUAL PROJECT DETAIL MAY VARY