




# RIDGE-LOK INSULATED METAL PANEL OPEN FRAMING DETAILS INSTALLATION DETAIL

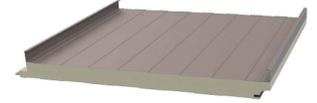

**KEYNOTES:**

- "D" = ROOF PANEL THICKNESS  
(AVAILABLE THICKNESS = 2.5", 3", 4", 5" OR 6")
- DIMENSIONS SHOWN ARE FOR 4" THICK ROOF PANEL.  
ADJUST DIMENSION PROPORTIONALLY FOR OTHER  
ROOF PANELS THICKNESS.
- CLIP FASTENERS MUST PENETRATE TOP FLANGE OF "Z"  
PURLIN SUBSTRATE BY 5/8" MINIMUM THREAD LENGTH
- CLIP SPACING VARIES BASED ON PROJECT SPECIFIC  
LOADS AND/OR LOCAL BUILDING CODES

DO NOT OVER DRIVE FASTENERS

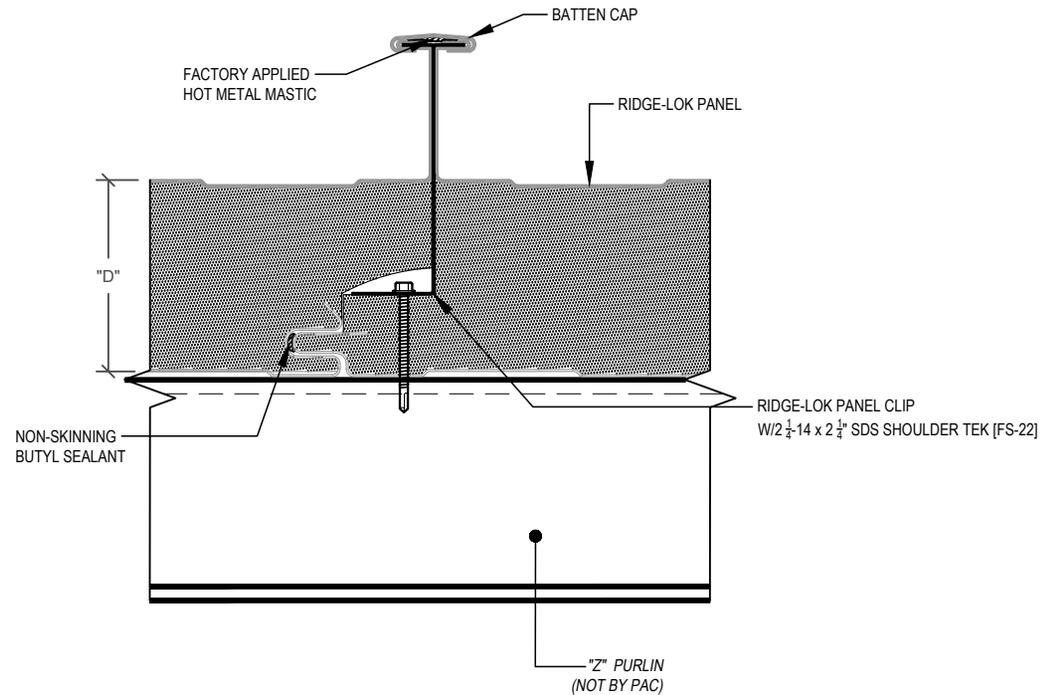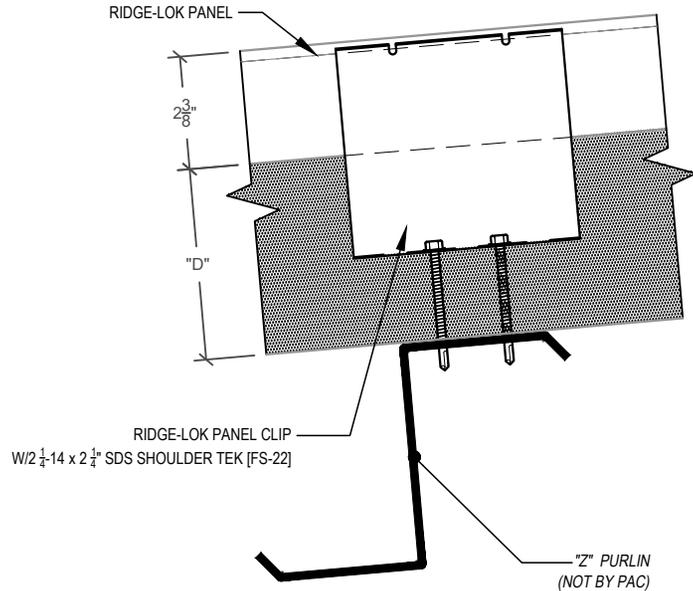

SCALE: 3" = 1'-0"



EFFECTIVE DATE: 06-07-2024  
SUBJECT TO CHANGE WITHOUT NOTICE

DISCLAIMER: DETAIL SHOWN FOR ILLUSTRATION PURPOSES ONLY. ACTUAL PROJECT DETAIL MAY VARY

RL-CC-001 / RL-SL-001