


INSULATED METAL PANEL WALL - HORIZONTAL - OPEN FRAMING DETAILS INSIDE CORNER DETAIL



THIS DETAIL DRAWING IS APPLICABLE TO ALL PAC-IMP SERIES WALL PANEL PROFILES

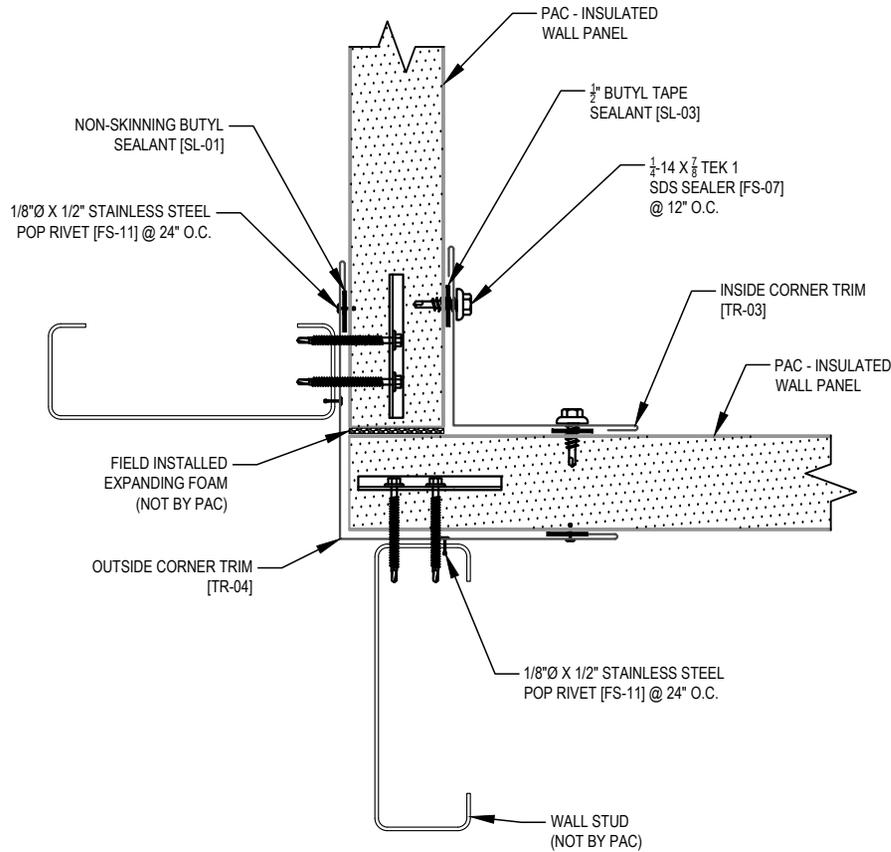


KEYNOTES:

- CLIP FASTENERS MUST PENETRATE TOP FACE OF WALL STUD SUBSTRATE BY 5/8" MINIMUM THREAD LENGTH
- CLIP SPACING AND TYPE VARIES BASED ON PROJECT SPECIFIC LOADS AND/OR LOCAL BUILDING CODES
- FILLER INSULATION MATERIAL AND APPLICATION SPECIFIED BY ARCHITECT
- FIELD CUT STARTING PANEL AND ENDING PANEL AS REQUIRED AT CORNER TRANSITION

SCALE: 3" = 1'-0"



EFFECTIVE DATE: 09-12-2024
SUBJECT TO CHANGE WITHOUT NOTICE

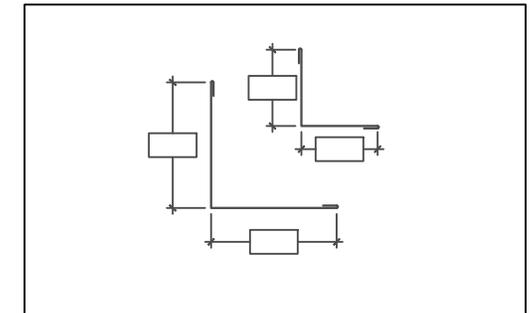

FLASHINGS

DISCLAIMER: DETAIL SHOWN FOR ILLUSTRATION PURPOSES ONLY. ACTUAL PROJECT DETAIL MAY VARY