


INSULATED METAL PANEL WALL - HORIZONTAL - OPEN FRAMING DETAILS INSTALL DETAIL



THIS DETAIL DRAWING IS APPLICABLE TO ALL PAC-IMP SERIES WALL PANEL PROFILES

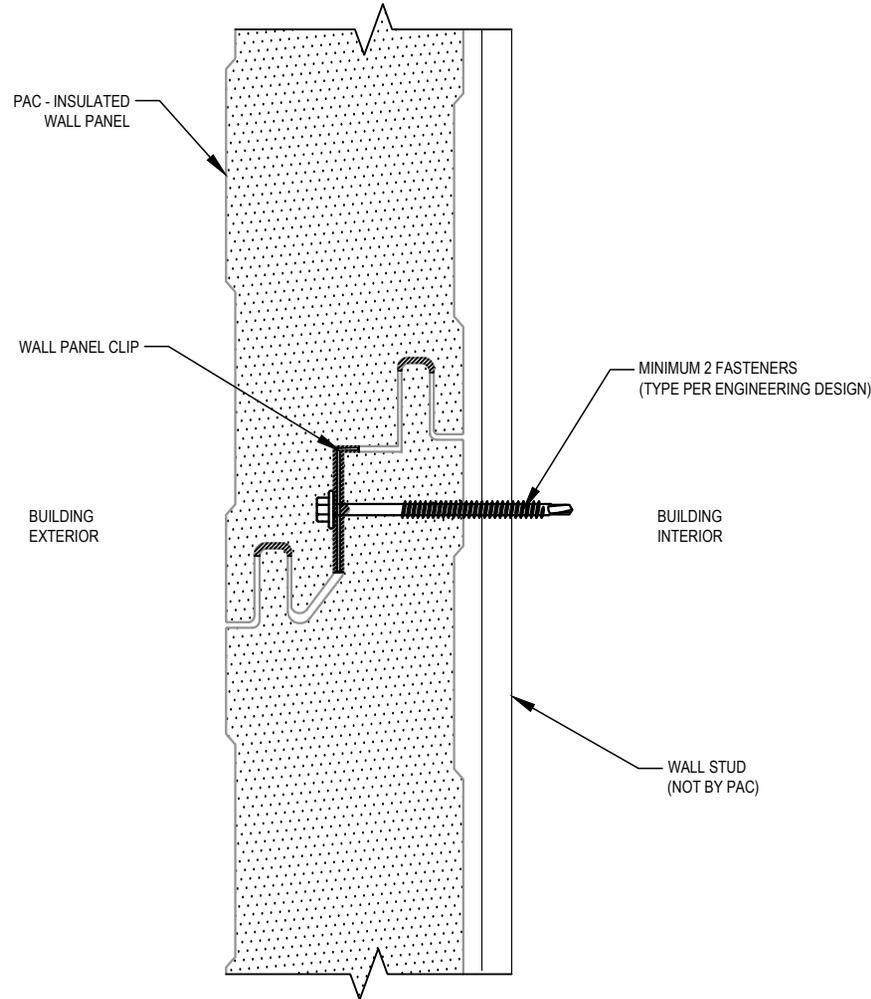

KEYNOTES:

- CLIP FASTENERS MUST PENETRATE TOP FACE OF WALL STUD SUBSTRATE BY 5/8" MINIMUM THREAD LENGTH
- CLIP SPACING AND TYPE VARIES BASED ON PROJECT SPECIFIC LOADS AND/OR LOCAL BUILDING CODES
- 3/8" UNIFORM BEAD OF NON-SKINNING BUTYL SEALANT MUST BE APPLIED IN THE EXTERIOR FEMALE GROOVE. APPLYING SEALANT IN THE INTERIOR GROOVE IS OPTIONAL DEPENDING ON VAPOR SEAL REQUIREMENTS.

SCALE: 3" = 1'-0"



EFFECTIVE DATE: 09-12-2024
SUBJECT TO CHANGE WITHOUT NOTICE

DISCLAIMER: DETAIL SHOWN FOR ILLUSTRATION PURPOSES ONLY. ACTUAL PROJECT DETAIL MAY VARY

HS-0001