

# SNAP-ON STANDING SEAM PANEL

## MATERIALS




.032 aluminum

24 gauge steel\*

## SPECS

12", 16", 18" or 20" O.C. 1" High

UL-90

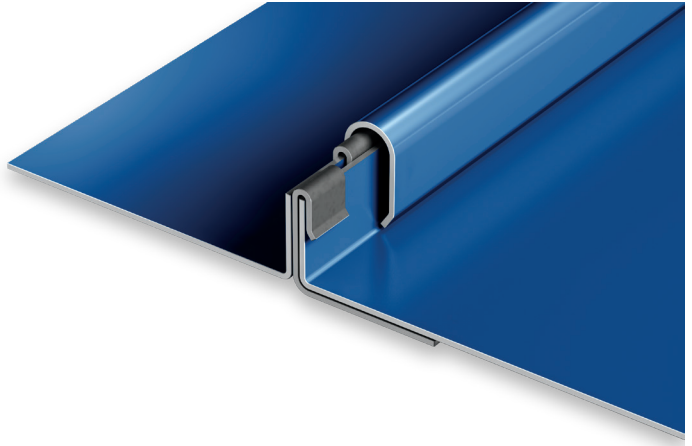

## PRODUCT FEATURES

- ▶ Ideal for transition roofs
- ▶ Pencil ribs available
- ▶ 35-year non-prorated finish warranty
- ▶ Panel lengths up to 35'

## MATERIAL

- ▶ 24 gauge steel

- ▶ .032 aluminum
- ▶ Galvalume Plus available

## UL CLASSIFICATION

- ▶ UL-580 Class 90 rated over solid substrate. (steel only - up to 18" O.C.)
- ▶ UL-1897 wind uplift
- ▶ UL-790 Class A fire rated
- ▶ UL-263 fire resistance rated

## ASTM TESTS

- ▶ ASTM E283/1680 tested
- ▶ ASTM E331/1646 tested

## FLORIDA BUILDING PRODUCT APPROVALS

Please refer to [pac-clad.com](http://pac-clad.com) or your local factory for specific product approval numbers for Snap-On Panels.

\*12" and 18" 24 gauge steel Snap-On Standing Seam panels and 11" and 18" 24 gauge steel High Snap-On Standing Seam panels are UL-90 Classified over solid substrate. See roof deck construction in Underwriter Laboratories roofing materials and systems directory.

A complete specification is available online at [pac-clad.com](http://pac-clad.com).