

# PAC-TITE WR Gutter


## Prefabricated Gutter and Downspout Systems



### Superior, Tested, Attractive Roof Drainage

Superior roof drainage, easy installation, and attractive appearance make PAC-TITE prefabricated gutters and downspouts stand out from the crowd.

Prefabricated PAC-TITE WR Gutters are specifically engineered and tested to meet the requirements of the ANSI/SPRI GT-1 Standard for Gutter Systems Used with Low-Slope Roofs. The design incorporates an extruded internal gutter hanger for strength and support. It also reduces the torque of the metal with expansion and contraction in temperature changes.

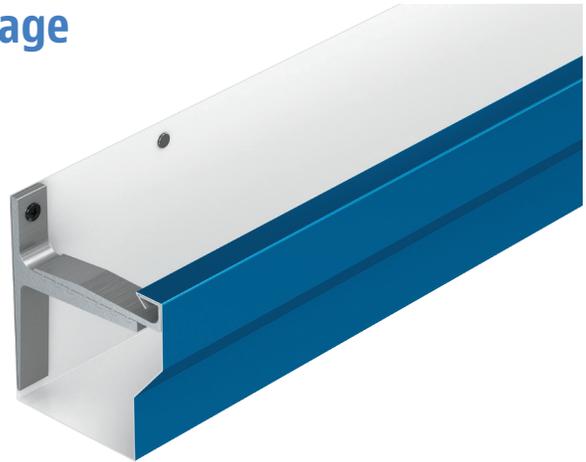

#### FEATURES

- ▶ 30 Year, 160 MPH Wind Warranty
- ▶ ANSI/SPRI GT-1 Tested to Comply with International Building Code
- ▶ FM Approved for Wind Uplift Protection
- ▶ Pre-Punched Holes and No External Brackets=Less Installation Time
- ▶ Prefabricated Miters and Accessories Eliminate Need for Field Fabrication
- ▶ Variety of Colors, Sizes & Materials

#### STANDARD SIZES


(Front / Bottom / Back)

- ▶ 5.25" / 5.25" / 6.25"      ▶ 6.75" / 6.75" / 7.75"
- ▶ 5.75" / 5.75" / 6.75"      ▶ 7.25" / 7.25" / 8.25"
- ▶ 6.25" / 6.25" / 7.25"      ▶ 7.75" / 7.75" / 8.75"

#### MATERIALS

- ▶ 24 ga. Steel      ▶ 050" Aluminum
- ▶ 22 ga. Steel      ▶ 063" Aluminum
- ▶ 040" Aluminum

**NOTE: FM Approved Design has an alternative bracket configuration.**

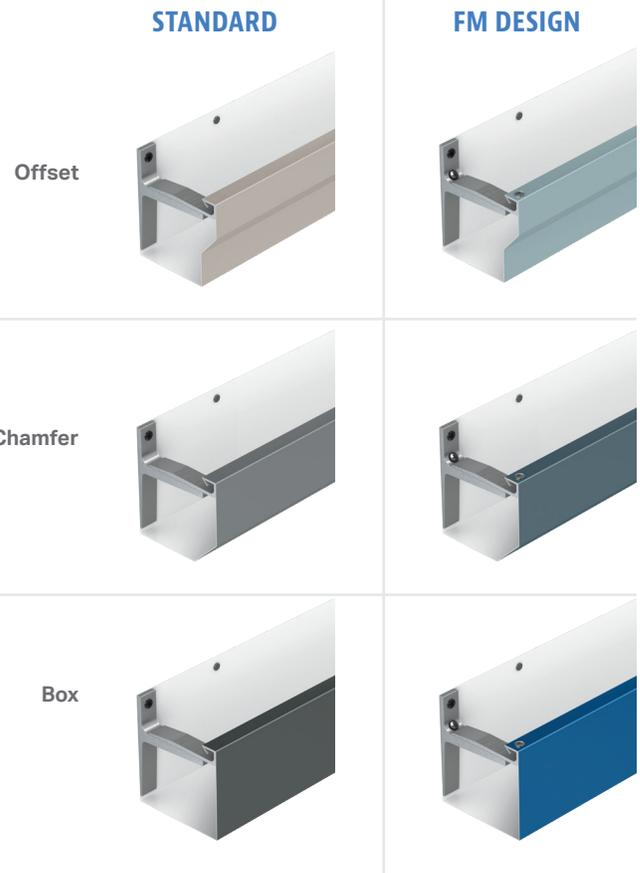

# PAC-TITE WR Gutter

## Prefabricated Gutter and Downspout Systems



Product Line	WR Gutters	LT Gutters	Industrial Downspouts	LT Downspouts
Versions	<ul style="list-style-type: none"> <li>· Offset</li> <li>· Chamfer</li> <li>· Box</li> </ul>	<ul style="list-style-type: none"> <li>· Half Round</li> <li>· K-Style</li> </ul>	<ul style="list-style-type: none"> <li>· Closed</li> <li>· Open Face</li> </ul>	<ul style="list-style-type: none"> <li>· Corrugated</li> <li>· Round</li> </ul>
Sizes	<p><b>Bottom Width &amp; Front Height:</b> 5.25", 5.75", 6.25", 6.75", 7.25", 7.75"</p> <p><b>Back Height:</b> 1" More Than Front Height</p>	<p><b>Half Round:</b> 5", 6", 7", 8", 9", 10" (Diameter)</p> <p><b>K-Style:</b> 6", 7", 8" (Width)</p>	<p><b>Width:</b> Min. 3"   Max. 10"</p> <p><b>Depth:</b> Min. 3"   Max. 10"</p>	<p><b>Round:</b> 3", 4", 5", 6", 8" (Diameter)</p> <p><b>Corrugated:</b> 3" x 4" and 4" x 5"</p>
Materials	24 ga., 22 ga. .040", .050", .063"	24 ga., 22 ga. .032", .040", .050"	24 ga., 22 ga. .040", .050", .063"	24 ga., 22 ga. .032", .040", .050"
Warranty	30 Year, 160 MPH	10 Year, 90 MPH	5-Year Workmanship	5-Year Workmanship
ANSI/SPRI GT-1 Tested	X		N/A	N/A
FM Approved	X		N/A	N/A

