




# PAC-TITE WR GUTTER CHAMFER

# FM DESIGN

## \*NOTES

- Bottom sizes are provided in 1/2" increments
- Maximum downspout dimension not to exceed "B" minus 2-1/16"
- Roof flange is optional. If flange size is not provided, the gutter will not include a roof flange. If flange angle not provided, the gutter will have a 90-degree flange.
- Pop rivets provided
- Unless otherwise noted, fabrication of miters and accessories are provided with a non-penetrating quicklock joint, then factory sealed watertight
- Welded accessories require minimum material thickness of .050 aluminum.
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/GT-1 test pressures up to 596 psf (Horizontal), 224 psf (Vertical), 160 plf (Downward)

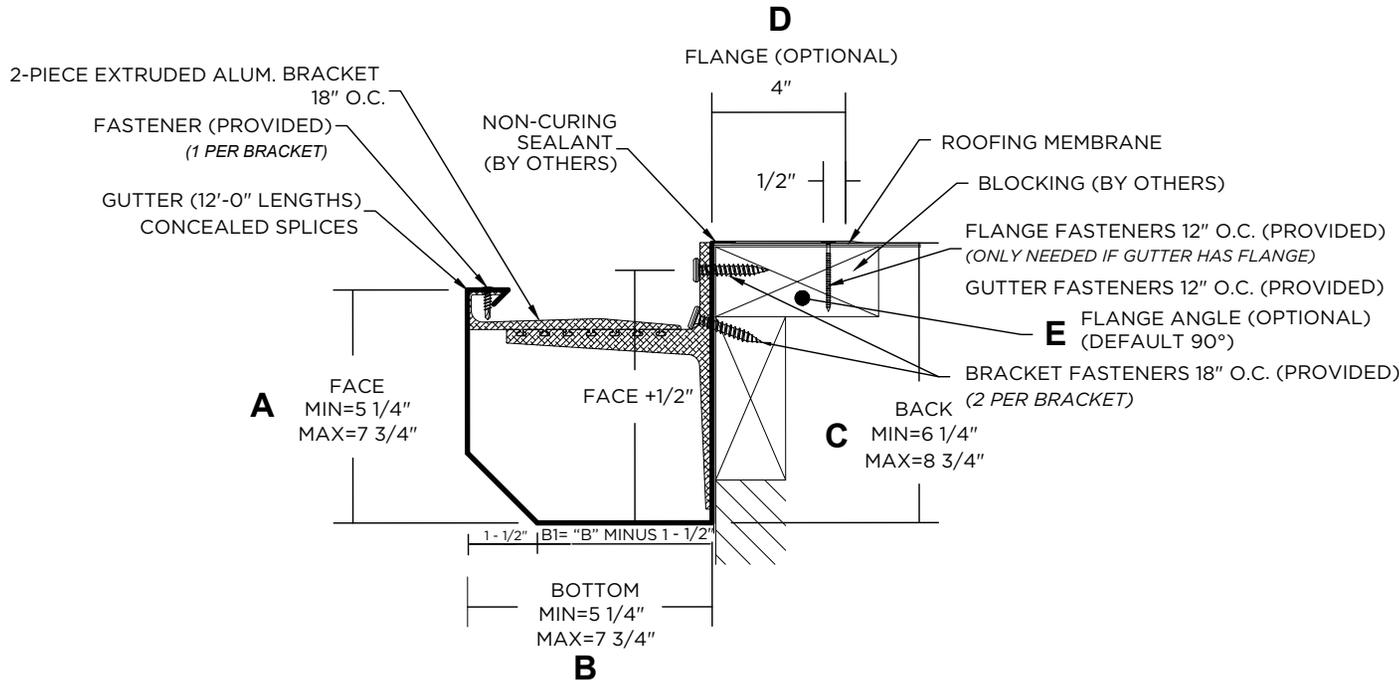

## APPROVALS\*



**ANSI/SPRI/GT-1**  
Test Pressures listed in notes

## PROJECT INFO

Project Name: \_\_\_\_\_

Architect: \_\_\_\_\_

Roofing Contractor: \_\_\_\_\_

### Project Type:

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

SHT# \_\_\_\_\_ of \_\_\_\_\_

DATE: **06/03/25**

Date: \_\_\_\_\_

DRN BY: **MLM**

CKD BY: **MM**

DWG #: **41012-44771**

REV: **A**

**Petersen Aluminum Corporation**  
Phone: 800-323-1960  
Fax: 800-722-7150  
www.pac-clad.com  
e-mail: info@pac-clad.com

## DIMENSIONS

SELECT SIZE	A (FACE)	B (BOTTOM)	C (BACK)	FLANGE (OPTIONAL)
<input type="checkbox"/>	5 1/4"	5 1/4"	6 1/4"	<b>D (FLANGE)</b> PLEASE SELECT ONE: WITH FLANGE <input type="checkbox"/> WITHOUT FLANGE <input type="checkbox"/>
<input type="checkbox"/>	5 3/4"	5 3/4"	6 3/4"	NOTE: IF NEITHER BOX IS CHECKED, THE GUTTER WILL BE PROVIDED <b>WITHOUT</b> A ROOF FLANGE
<input type="checkbox"/>	6 1/4"	6 1/4"	7 1/4"	<b>E (FLANGE ANGLE)</b> NOTE: IF ANGLE IS NOT PROVIDED, FLANGE WILL BE 90°
<input type="checkbox"/>	6 3/4"	6 3/4"	7 3/4"	
<input type="checkbox"/>	7 1/4"	7 1/4"	8 1/4"	
<input type="checkbox"/>	7 3/4"	7 3/4"	8 3/4"	

## MATERIAL

24 Ga. Galv. Steel      Color: \_\_\_\_\_

22 Ga. Galv. Steel      Finish: \_\_\_\_\_

.040" Aluminum

.050" Aluminum

.063" Aluminum

OTHER: \_\_\_\_\_

Substrate:  Wood  
If substrate is not given, wood fasteners will be provided.  Masonry  Metal

## QUANTITIES

\_\_\_\_\_ Lineal Feet (12'-0" Lengths)

\_\_\_\_\_ Outside Miter (90°)



\_\_\_\_\_ Inside Miter (90°)

\_\_\_\_\_ Right Endcaps


\_\_\_\_\_ Left Endcaps

\_\_\_\_\_ Expansion Joints (If Required)


Accessory Type\*:  Quicklock (Default)  Welded (Surcharge)

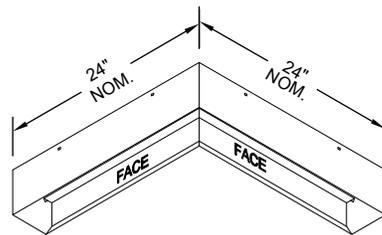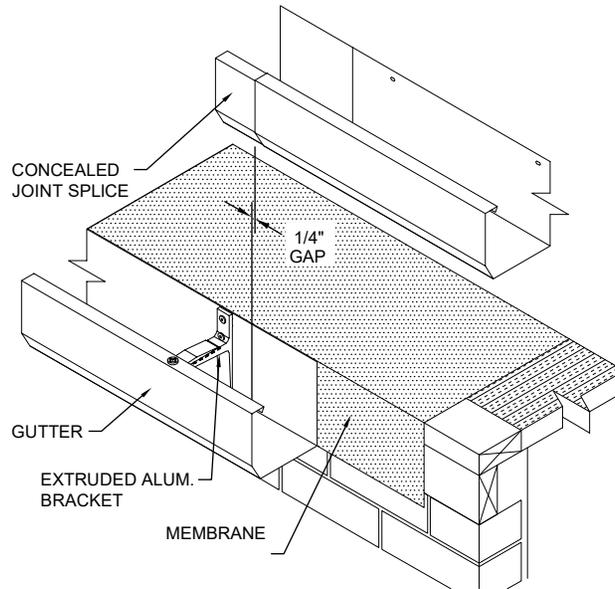


INSIDE MITER

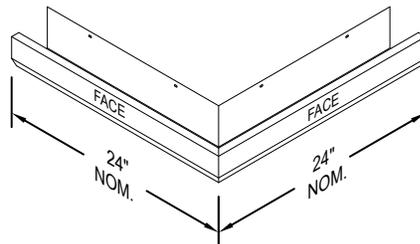

OUTSIDE MITER



END CAP  
LEFT HAND SHOWN

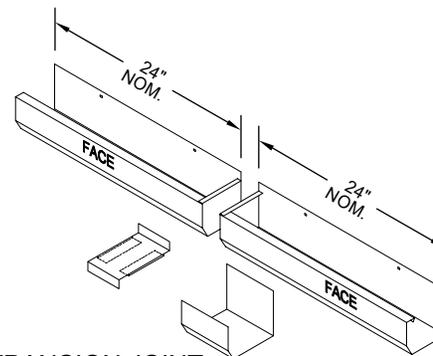

EXPANSION JOINT  
(IF REQUIRED)

Standard gutter miter leg lengths are 24" Nominal  
Standard gutter miter angle is 90°  
For special miter requirements, attach sketches or consult manufacturer for assistance.

SHT# \_\_\_\_ of \_\_\_\_

DATE: 06/03/25

DRN BY: MLM

CKD BY: MM

DWG #: 41012-44771

REV: A

**Petersen Aluminum Corporation**

Phone: 800-323-1960

Fax: 800-722-7150

www.pac-clad.com

e-mail: info@pac-clad.com