


16" & 18" Tite-Loc Plus

2.0" Mechanical Seam Panel w/sealant

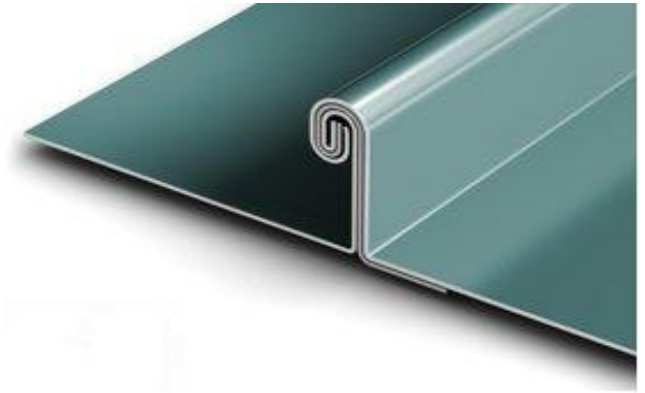

.032" ALUM	.032" ALUM	24 ga. STEEL	24 ga. STEEL
5/8" Plywood	22 ga. Decking	5/8" Plywood	22 ga. Decking
NOA# 13-0222.05	NOA# 13-0222.04	NOA# 13-0222.07	NOA# 13-0222.06

Florida Product Approval: FL16142

Field Pressure w/Clips @ 24" o/c	-121.75	-114.25	-114.25	-106.75
Corner Pressure w/Clips @ 6" o/c	-174.25	-204.25	-204.25	-196.75

Rev. 04/25/13

Maximum Design Pressures: test standard UL580/UL1897 includes a 2.0 Factor of Safety.

