Snap-Clad Panel

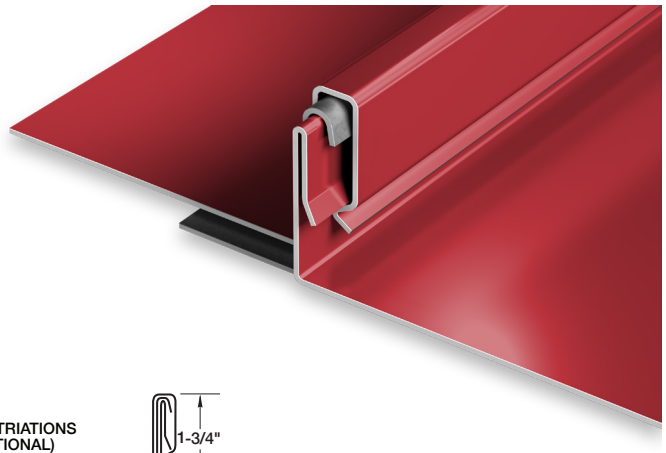

MATERIALS

.032 aluminum	24 gauge steel
.040 aluminum	22 gauge steel

SPECS

10", 12", 16" or 18" O.C.*	1-3/4" High

UL-90

ICC ES

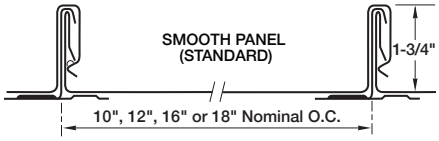

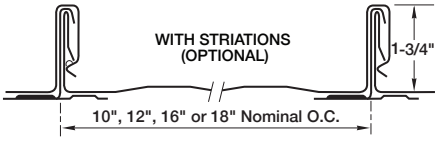

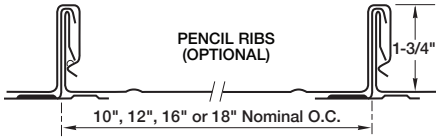

PRODUCT FEATURES

- Architectural/structural panel
- Factory-applied sealant available
- Continuous interlock
- Labor-saving one-piece design
- Pencil ribs upon request
- Striations upon request
- Factory eave notching available
- 35-year non-prorated finish warranty
- Maximum factory-produced panel length is 64' (check w/factory for longer lengths)
- Weathertightness warranty available
- 24 gauge steel
- 22 gauge steel
- .032 aluminum
- .040 aluminum
- Panels available in Galvalume Plus

UL CLASSIFICATION

- UL-580 Class 90 wind uplift
- UL-1897 wind uplift
- UL-790 Class A fire rated
- UL-263 fire resistance rated
- UL-2218 impact resistance rated
- UL-90 rated aluminum panel up to 16" O.C.
- UL-90 rated steel panel up to 18" O.C.

ASTM TESTS

- ASTM E1592 tested
- ASTM E283/1680 tested
- ASTM E331/1646 tested

FLORIDA BUILDING & MIAMI-DADE PRODUCT APPROVALS

Please refer to pac-clad.com or your local factory for specific product approval numbers for Snap-Clad.

*widths are nominal

Note: UL 90 is available on steel panels up to 18" on center, and on aluminum panels up to 16" on center.

PAC-CLAD PETERSEN
A CARLISLE COMPANY

PAC-CLAD® is a registered trademark of Petersen Aluminum Corporation. 7/26