

Snap-On Standing Seam Panel

MATERIALS




.032 aluminum

24 gauge steel*

SPECS

12", 16", 18" or 20" O.C.** 1" High

UL-90

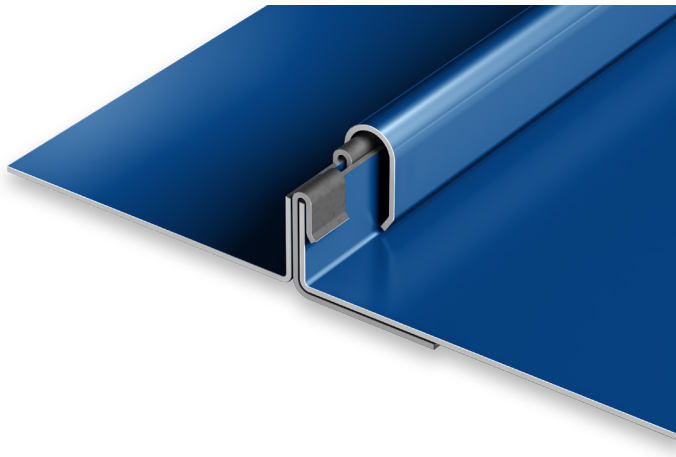

PRODUCT FEATURES

- ▶ Ideal for transition roofs
- ▶ Pencil ribs available
- ▶ 35-year non-prorated finish warranty
- ▶ Panel lengths up to 35'

MATERIAL

- ▶ 24 gauge steel

- ▶ .032 aluminum
- ▶ Galvalume Plus available

UL CLASSIFICATION

- ▶ UL-580 Class 90 rated over solid substrate. (steel only - up to 18" O.C.)
- ▶ UL-1897 wind uplift
- ▶ UL-790 Class A fire rated
- ▶ UL-263 fire resistance rated

ASTM TESTS

- ▶ ASTM E283/1680 tested
- ▶ ASTM E331/1646 tested

FLORIDA BUILDING PRODUCT APPROVALS

Please refer to pac-clad.com or your local factory for specific product approval numbers for Snap-On Panels.

*12" and 18" 24 gauge steel Snap-On Standing Seam panels and 11" and 18" 24 gauge steel High Snap-On Standing Seam panels are UL-90 Classified over solid substrate. See roof deck construction in Underwriter Laboratories roofing materials and systems directory.

** widths are nominal

A complete specification is available online at pac-clad.com.



PAC-CLAD® is a registered trademark of Petersen Aluminum Corporation. 7/26



PAC-CLAD.COM | 800 PAC CLAD