
Board and Batten


MATERIALS

.032 aluminum 24 gauge steel

SPECS

12" or 16" Wide* 3/4" High



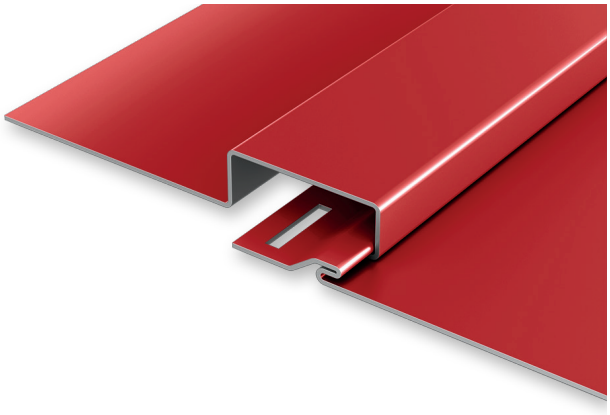

WHERE TIMELESS DESIGN MEETS MODERN ELEGANCE

The Board and Batten panel system provides a timeless design aesthetic for commercial and residential wall applications. It uses a concealed fastener system to maintain clean lines and a rhythmic pattern of alternating wide vertical boards and narrower elevated battens. The ¾" batten depth and 2" width create dimensional interest while keeping trim offsets to a minimum. Board and Batten panels blend smoothly into various architectural styles. Whether creating a cozy and inviting facade or a bold and striking statement, Board and Batten exterior wall panels remain a versatile tool for architectural creativity.

*widths are nominal

FEATURES

- Installs with concealed mechanical fasteners through pre-punched holes
- Vertical wall applications only
- Widths - 12", 16"*
- Batten is 2" wide and ¾" deep on all panel widths
- Maximum length for steel is 30 feet
- Maximum length for aluminum is 22 feet

TESTING

- ASTM E283
- ASTM E330
- ASTM E331
- TAS 202
- AAMA 501.1
- TAS 203

MAXIMUM RECOMMENDED PANEL LENGTHS

- 8'-0" nominal for 24 gauge steel and .032 aluminum

Oil canning is a natural characteristic of metal panels and is not considered a defect or cause for rejection. An oil canning acknowledgment form is required when Board & Batten panels are ordered beyond the recommended lengths.

PAC-CLAD PETERSEN
A CARLISLE COMPANY

PAC-CLAD® is a registered trademark of Petersen Aluminum Corporation. 9/26