Flush Wall Panels


PAC-CLAD PETERSEN
A CARLISLE COMPANY

MATERIALS


.032 aluminum
.040 aluminum*
24 gauge steel
22 gauge steel*

SPECS

7", 11" or 12" O.C.**
1" High

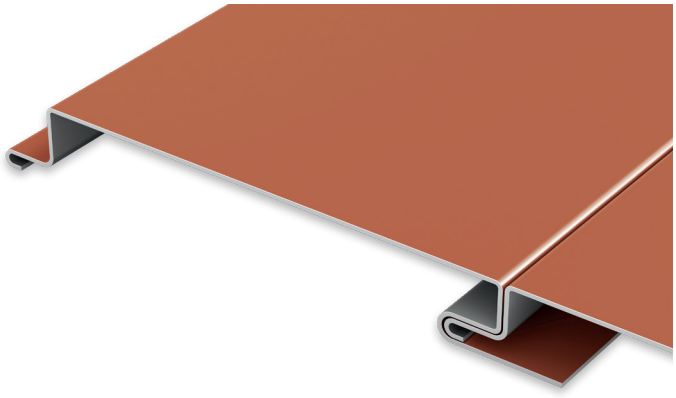


FLUSH PANEL

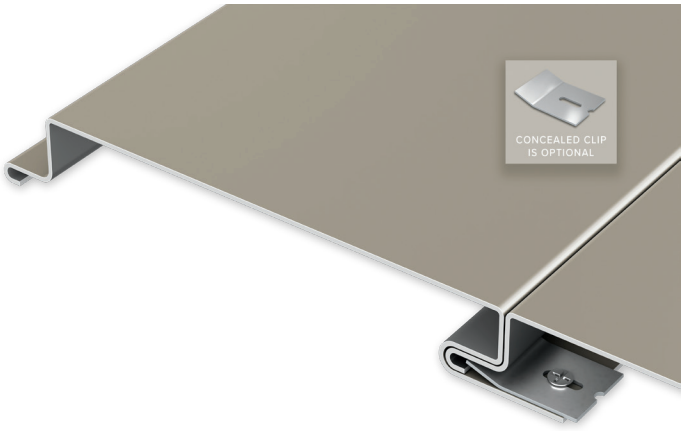


FLUSH PANEL W / CLIP (OPTIONAL)***

FLUSH PANEL

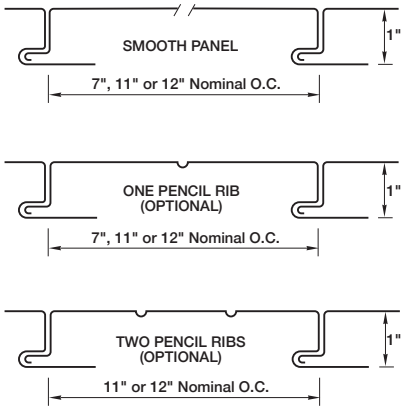

FLUSH PANEL W/ CLIP (OPTIONAL)

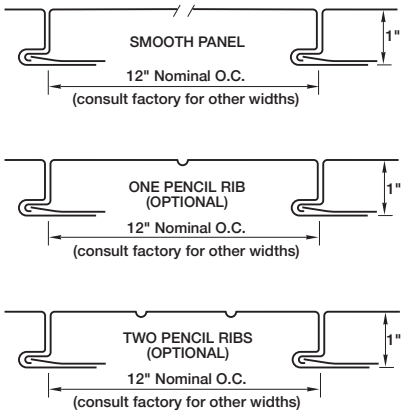

*Limited color availability. 12" O.C. has reduced fastening flange. A complete specification is available online at pac-clad.com.

**widths are nominal

***Optional concealed clips are available for added wind resistance when needed.

PRODUCT FEATURES

- Leveled for flatness
- Available with up to two pencil ribs
- Rounded interlock leg provides improved flush fit
- 35-year non-prorated finish warranty
- Panel lengths from 4' to 25'

MATERIAL

- 24 gauge steel
- 22 gauge steel
- .032 aluminum
- .040 aluminum
- Galvalume Plus available

FLORIDA BUILDING PRODUCT APPROVALS

Please refer to pac-clad.com or your local factory for specific product approval numbers for Flush panels.

ASTM TESTS - FLUSH

- ASTM E330 tested - 12" only
- ASTM 1592
- ASTM E283
- ASTM E331
- AAMA 501.1-05
- ICC ES-5839

MAXIMUM RECOMMENDED PANEL LENGTHS

- 8'-0" nominal for 24 gauge steel and .032 aluminum
- 20'-0" nominal for 22 gauge steel and .040" aluminum

Oil canning is a natural characteristic of metal panels and is not considered a defect or cause for rejection. An oil canning acknowledgment form is required when Reveal Wall Panels are ordered beyond the recommended lengths.

PAC-CLAD® is a registered trademark of Petersen Aluminum Corporation. 9/26