Flush/Reveal Soffit

PAC-CLAD PETERSEN
A CARLISLE COMPANY

MATERIALS


.032 aluminum
.040 aluminum*
24 gauge steel
22 gauge steel*

* Limited color availability


SPECS

7", 11" or 12" O.C.**
1" High


REVEAL SOFFIT




FLUSH SOFFIT



REVEAL SOLID

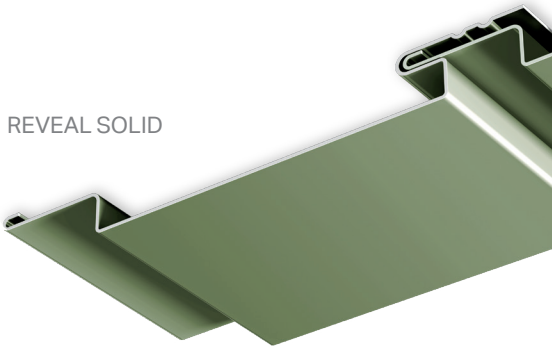

FLUSH SOLID

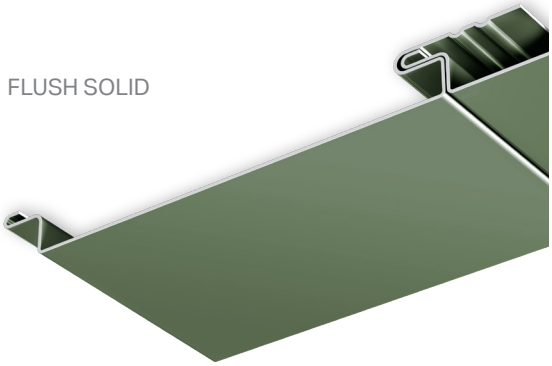

PRODUCT FEATURES

- Four profiles available
- Perforation available for ventilation on .032 aluminum only
- Roll-formed to exact lengths
- Matching "J" trim available
- 35-year non-prorated finish warranty

MATERIAL

- 24 gauge steel
- 22 gauge steel
- .032 aluminum
- .040 aluminum
- Galvalume Plus available

ASTM TESTS

- ASTM E330 Tested: Flush panel (12" only)

FLORIDA BUILDING PRODUCT APPROVALS

Please refer to pac-clad.com or your local factory for specific product approval numbers for soffit panels.

OPEN AIR PERCENTAGES FOR VENTED FLUSH PANELS

(these percentages are nominal and may vary per profile)


- Wide vent - 12%
- Narrow vent - 6%

MAXIMUM RECOMMENDED PANEL LENGTHS


- 8'-0" nominal for 24 gauge steel and .032 aluminum
- 20'-0" nominal for 22 gauge steel and .040" aluminum

Oil canning is a natural characteristic of metal panels and is not considered a defect or cause for rejection. An oil canning acknowledgment form is required when Board & Batten panels are ordered beyond the recommended lengths.

FLUSH WIDE VENT
11" and 12" width**,
.032 aluminum only

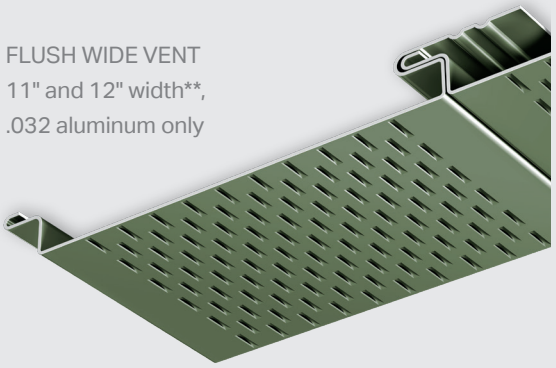

FLUSH NARROW VENT
7", 11" and 12" width**,
.032 aluminum only

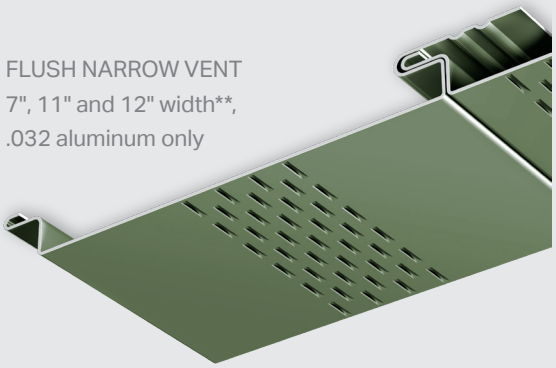

**widths are nominal

PAC-CLAD® is a registered trademark of Petersen Aluminum Corporation. 9/26