


# PAC-TITE ANGULAR FASCIA

## BUILT-UP OR MODIFIED VERSION

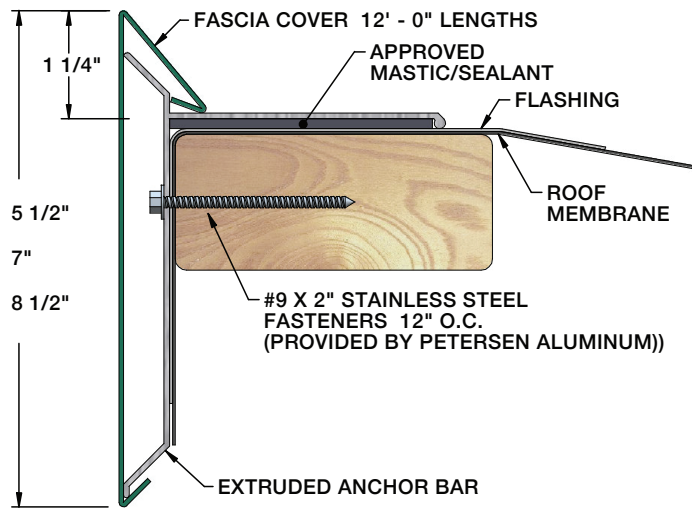

### SIZES

| Face Heights | Nailer Coverage |
|--------------|-----------------|
| 5 1/2"       | 1 Nailers       |
| 7"           | 2 Nailers       |
| 8 1/2"       | 4 Nailers       |

### PRODUCT FEATURES

- ▶ Unmatched uplift protection in modified/built-up roof edge applications
- ▶ Combines superior strength and aesthetics with ease of installation
- ▶ Non-penetrating design eliminates need to strip-in deck flange
- ▶ Superior watertight integrity of the installation
- ▶ Extruded aluminum anchor bar allows for vertical face attachment without penetration of horizontal flange
- ▶ Minimizes potential delamination between asphalt and metal deck flange
- ▶ Extensively tested to exceed industry standards
- ▶ Pre-punched holes for precise fastener placement and quick installation
- ▶ Slotted holes allow for thermal movement
- ▶ Lifetime, 215 mph wind warranty available

- ▶ Wide variety of colors and finishes
- ▶ Convenient 12' Lengths
- ▶ Custom and radius capabilities available
- ▶ Reusable and recyclable for reinstallation

### MATERIALS

- ▶ 43 Stocked PAC-CLAD Finishes (24 gauge steel)
- ▶ 22 Stocked PAC-CLAD Finishes (.040 aluminum)
- ▶ Mill Finish Aluminum (.040 aluminum)
- ▶ Clear and Colored Anodized (.040 aluminum)

### ACCESSORIES

- ▶ Miters (90 Degrees and Non-90 Degrees)
- ▶ Scuppers (Downspout, Spillover and Overflow)
- ▶ Drainage Components

### TESTING

- ▶ ANSI-SPRI/FM 4435/ES-1 Standard to a design pressure of 290 lbs/ft<sup>2</sup> to comply with the International Building Code
- ▶ Factory Mutual approved
- ▶ Miami-Dade Approved to comply with the "High Velocity Hurricane Zone" of the Florida Building Code

### WARRANTY

A Lifetime 215 mph warranty is available. It covers replacement or repair of any portion of the roof edge system that has failed due to a defect in the supplied materials. The warranty covers the roof edge for the lifetime of the roof on which it was originally installed.