Reveal Wall Panels

PAC-CLAD PETERSEN
A CARLISLE COMPANY

MATERIALS

.032 aluminum
.040 aluminum*
24 gauge steel
22 gauge steel*

SPECS

7", 11" or 12" O.C.**
1" High

REVEAL PANEL

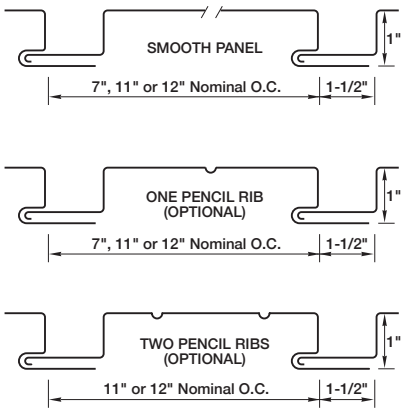

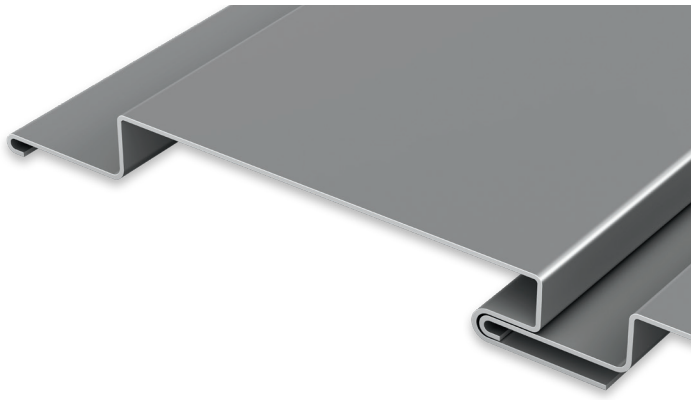

REVEAL PANEL

REVEAL PANEL W/ CLIP (OPTIONAL)

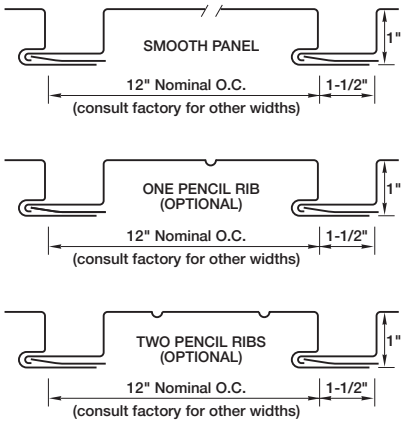

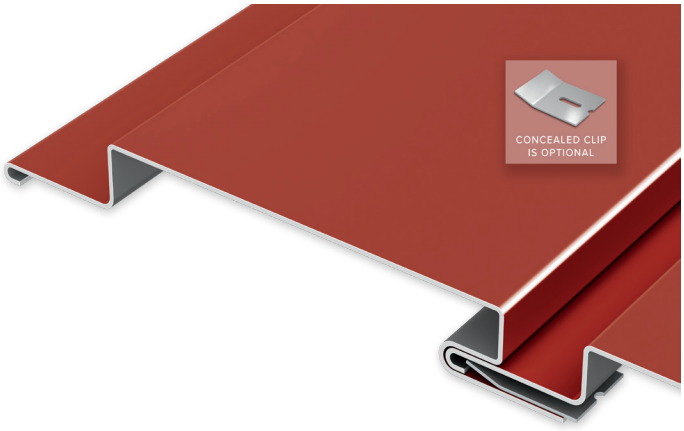

REVEAL PANEL W / CLIP (OPTIONAL)***

PRODUCT FEATURES

- Leveled for flatness
- Available with up to two pencil ribs
- Rounded interlock leg provides improved flush fit
- 35-year non-prorated finish warranty
- Panel lengths from 4' to 25'

MATERIAL

- 24 gauge steel
- 22 gauge steel
- .032 aluminum
- .040 aluminum
- Galvalume Plus available

FLORIDA BUILDING PRODUCT APPROVALS

Please refer to pac-clad.com or your local factory for specific product approval numbers for Reveal panels.

MAXIMUM RECOMMENDED PANEL LENGTHS

- 8'-0" nominal for 24 gauge steel and .032 aluminum
- 20'-0" nominal for 22 gauge steel and .040" aluminum

Oil canning is a natural characteristic of metal panels and is not considered a defect or cause for rejection. An oil canning acknowledgment form is required when Reveal Wall Panels are ordered beyond the recommended lengths.

*Limited color availability. 12" O.C. has reduced fastening flange. A complete specification is available online at pac-clad.com.

**widths are nominal

***Optional concealed clips are available for added wind resistance when needed.

PAC-CLAD® is a registered trademark of Petersen Aluminum Corporation. 9/26